

## A: Datasheet

Algorithm: stاقو\_000

Developer: Stاقو Technologies

Submission Date: 2021\_08\_30

Template size: 4096 bytes

Template time (2.5 percentile): 807 msec

Template time (median): 826 msec

Template time (97.5 percentile): 858 msec

Investigation:

Frontal mugshot ranking 160 (out of 329) -- FNIR(1600000, 0, 1) = 0.0071 vs. lowest 0.0009 from sensetime\_006

Mugshot webcam ranking 127 (out of 291) -- FNIR(1600000, 0, 1) = 0.0202 vs. lowest 0.0057 from sensetime\_006

Mugshot profile ranking 118 (out of 260) -- FNIR(1600000, 0, 1) = 0.6133 vs. lowest 0.0550 from sensetime\_006

Immigration visa-border ranking 135 (out of 218) -- FNIR(1600000, 0, 1) = 0.0201 vs. lowest 0.0009 from sensetime\_006

Immigration visa-kiosk ranking 125 (out of 215) -- FNIR(1600000, 0, 1) = 0.1589 vs. lowest 0.0487 from cubox\_000

Identification:

Frontal mugshot ranking 157 (out of 329) -- FNIR(1600000, T, L+1) = 0.0611, FPIR=0.001000 vs. lowest 0.0017 from nec\_005


Mugshot webcam ranking 237 (out of 289) -- FNIR(1600000, T, L+1) = 0.4405, FPIR=0.001000 vs. lowest 0.0120 from nec\_005

Mugshot profile ranking 204 (out of 259) -- FNIR(1600000, T, L+1) = 0.9997, FPIR=0.001000 vs. lowest 0.1331 from cloudwalk\_hr\_000


Immigration visa-border ranking 172 (out of 217) -- FNIR(1600000, T, L+1) = 0.5367, FPIR=0.001000 vs. lowest 0.0032 from paravision\_009

Immigration visa-kiosk ranking 204 (out of 212) -- FNIR(1600000, T, L+1) = 1.0000, FPIR=0.001000 vs. lowest 0.0728 from paravision\_009


B: Mugshot natural images, identification mode: FNIR(N, L+1, T) vs. most accurate (nec\_005)

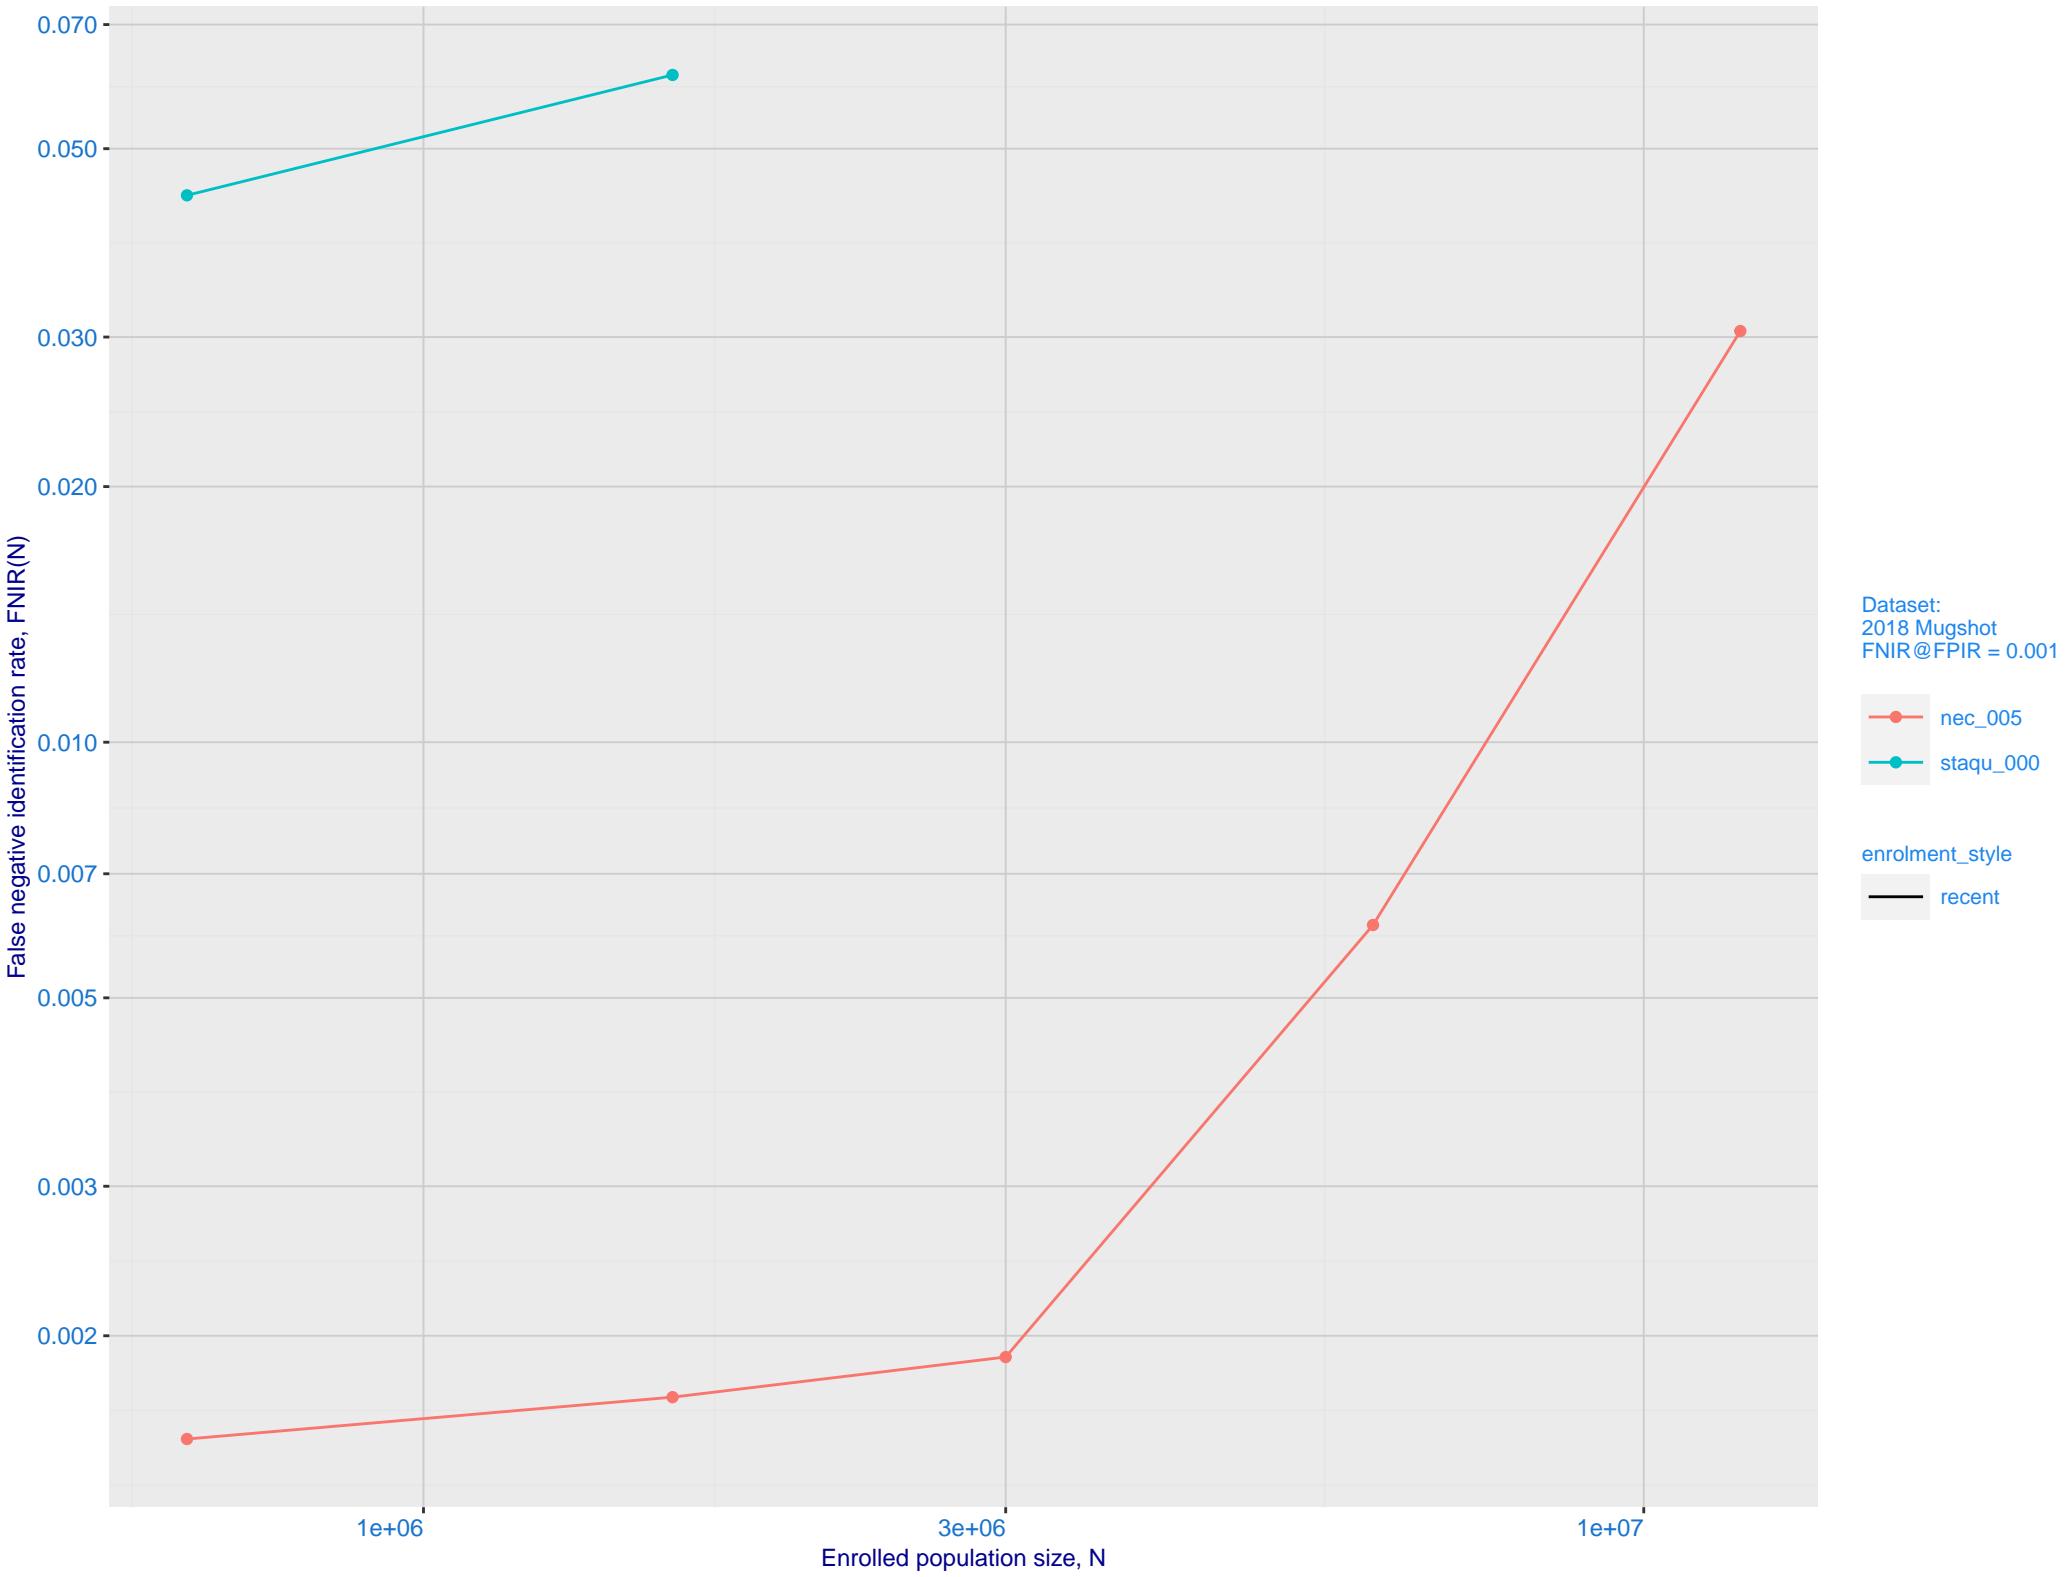


### C: Evolution of accuracy for STAQU algorithms on three datasets 2018 – present

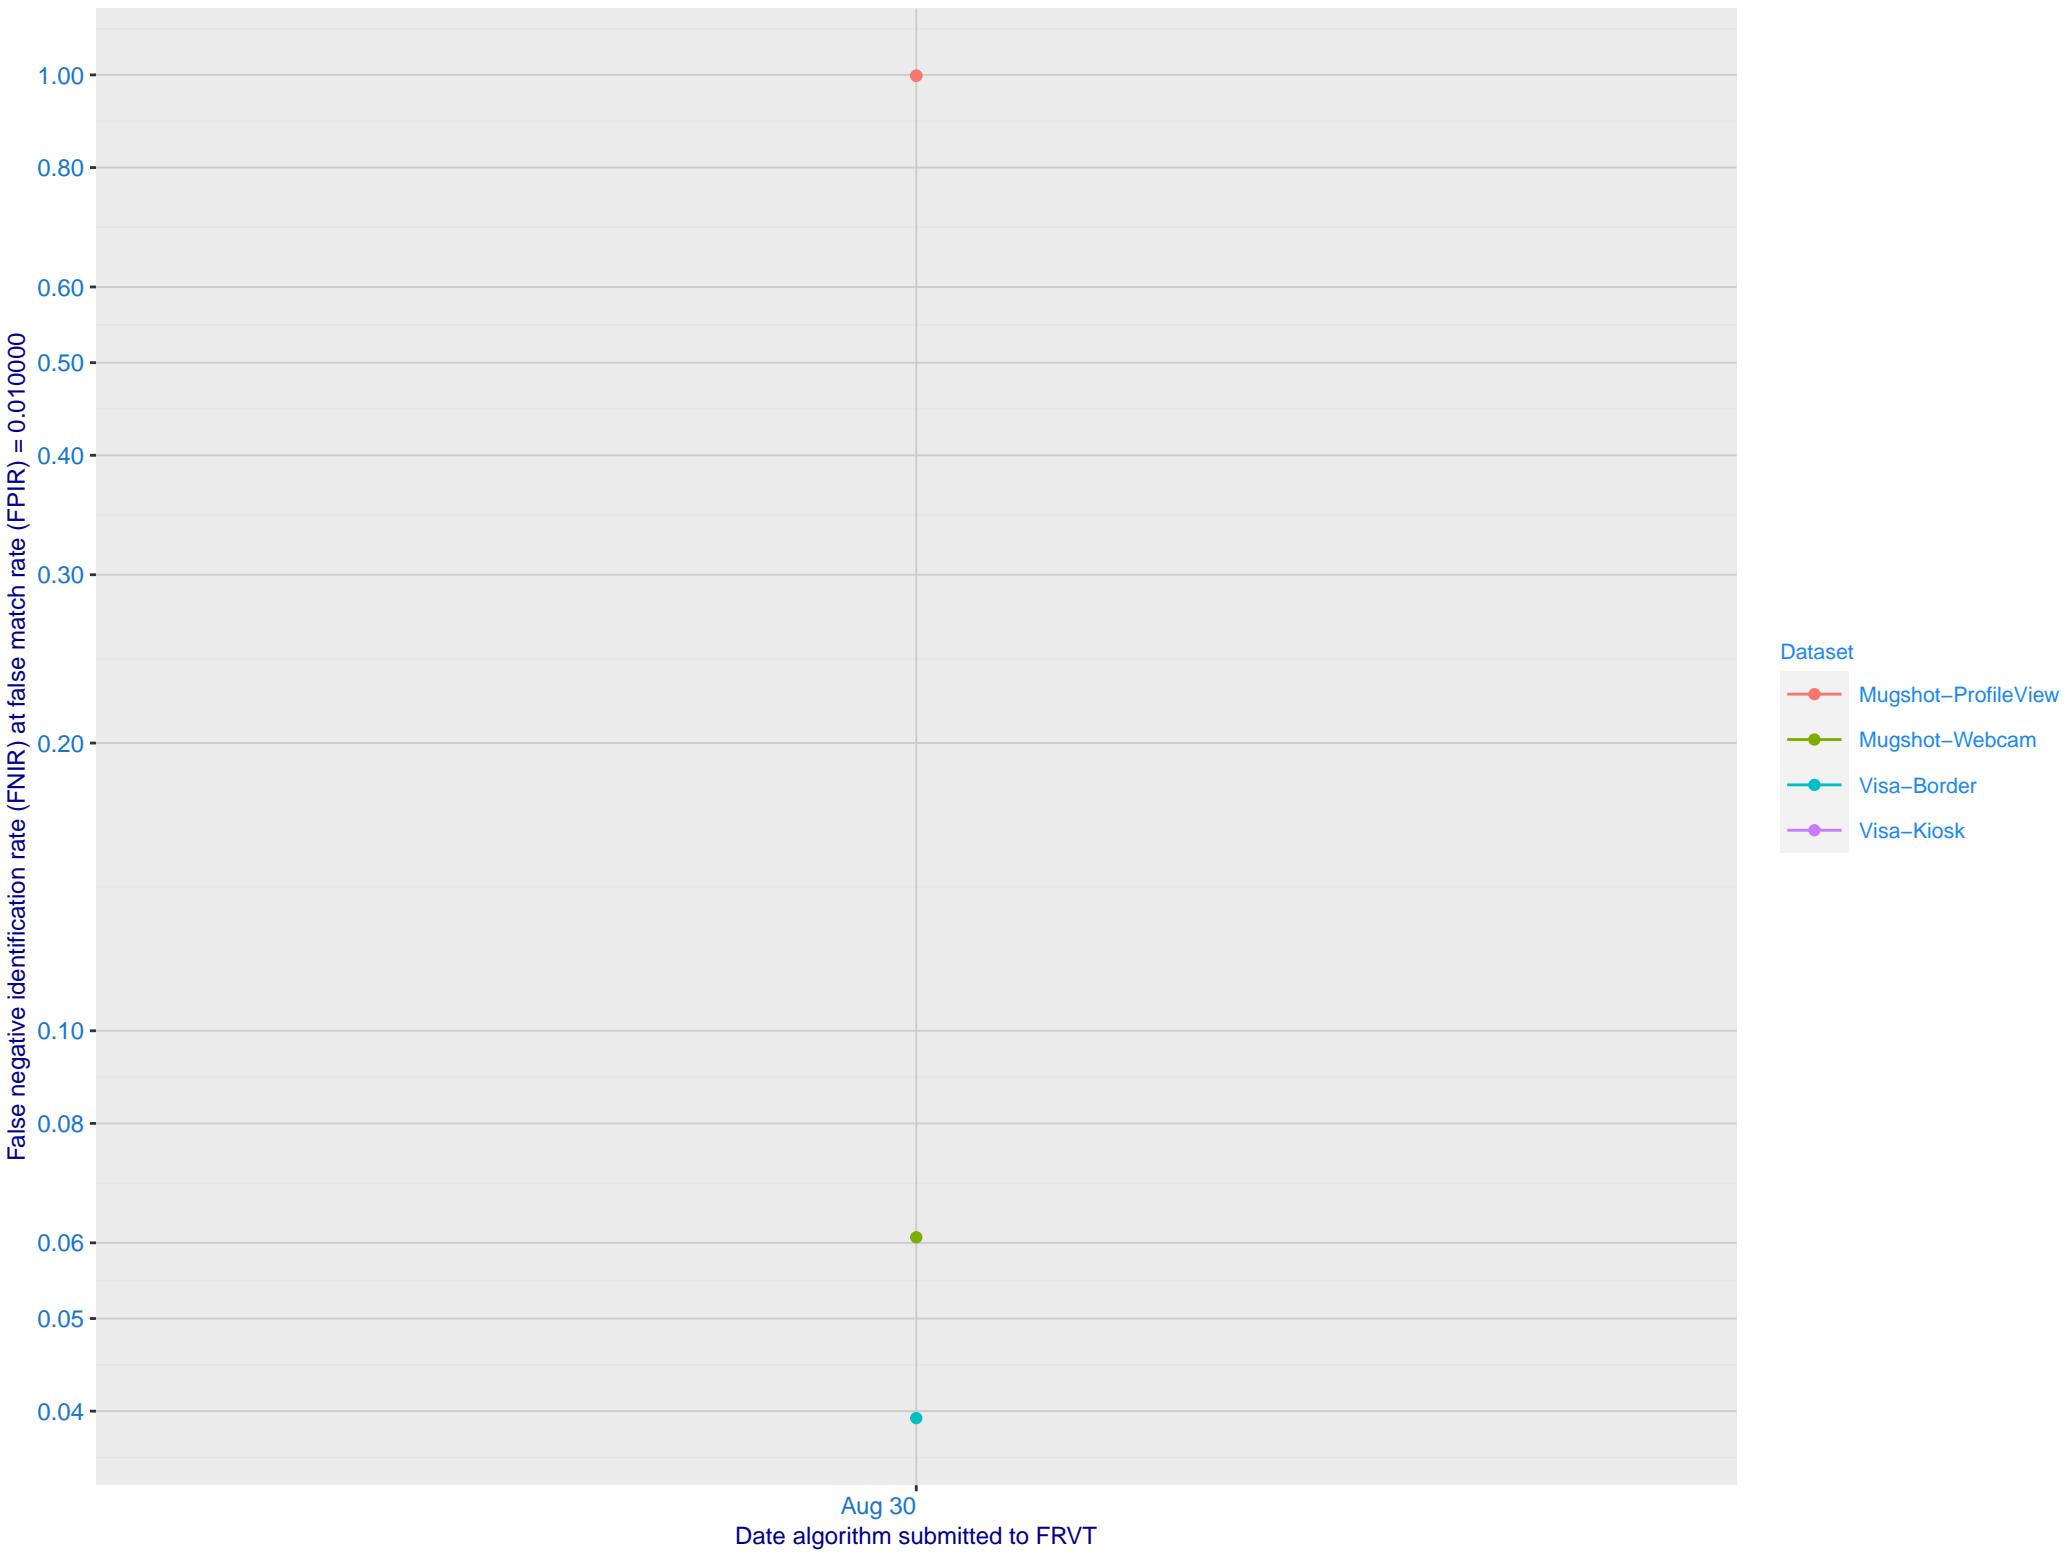


D: 1:N error tradeoff by dataset and enrollment type. N = 1600000 individuals

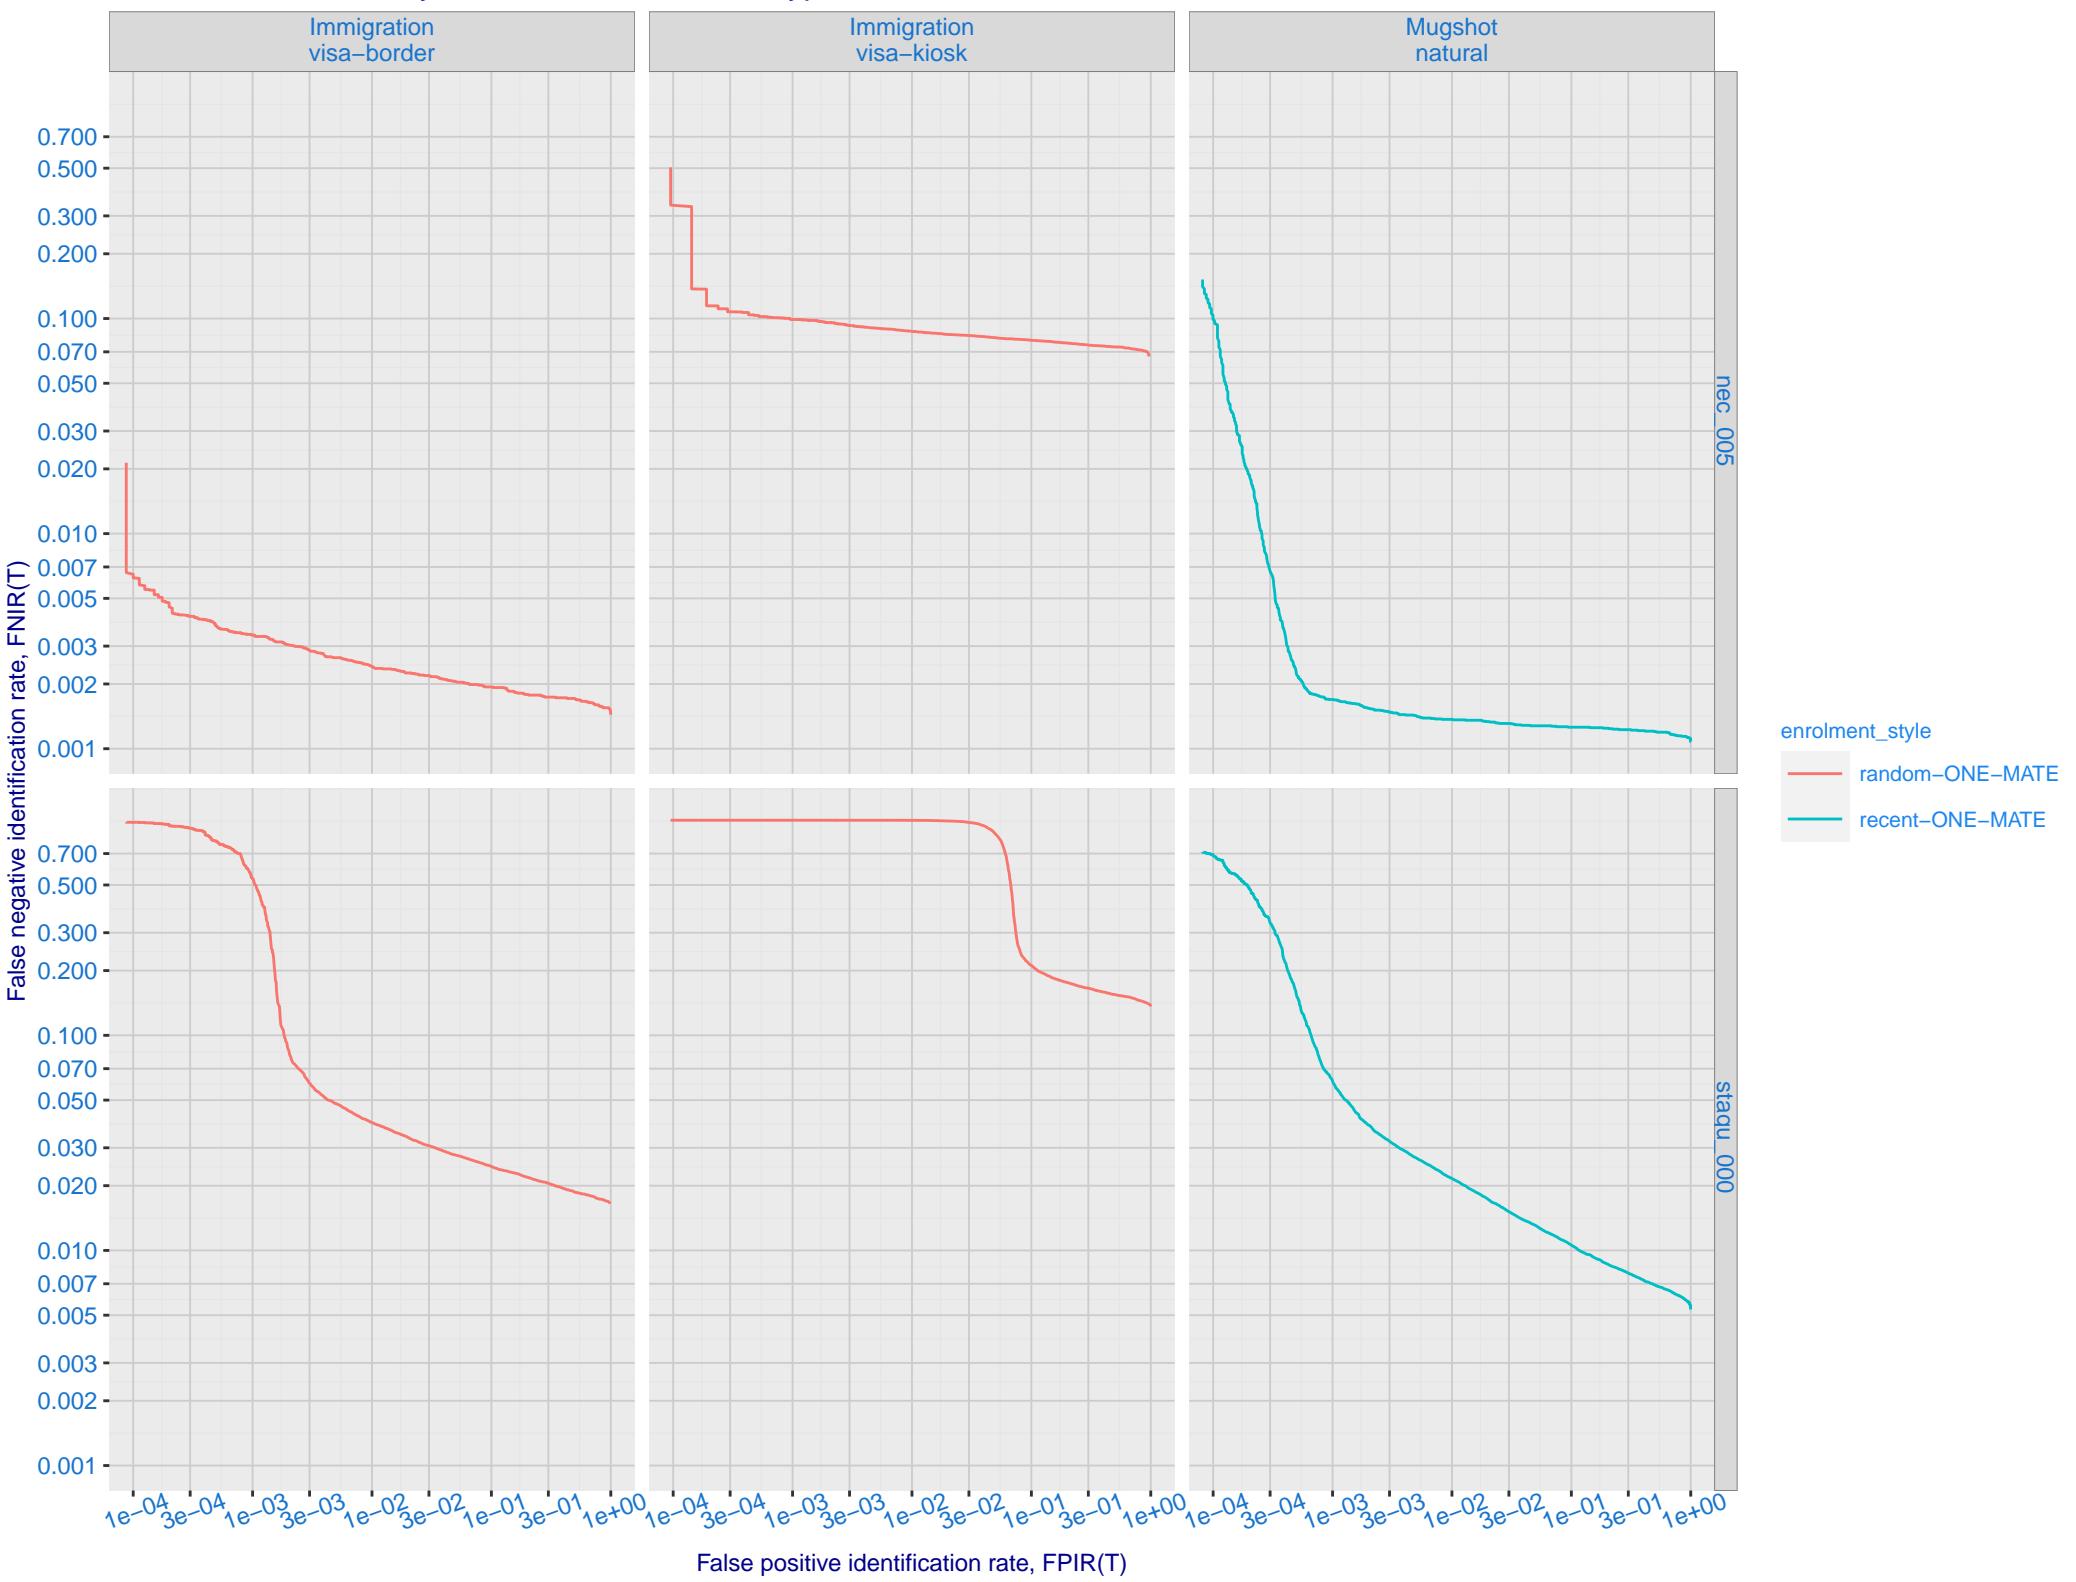


E: Dependence of error rates on T by number enrolled identities, N, for Mugshot natural images

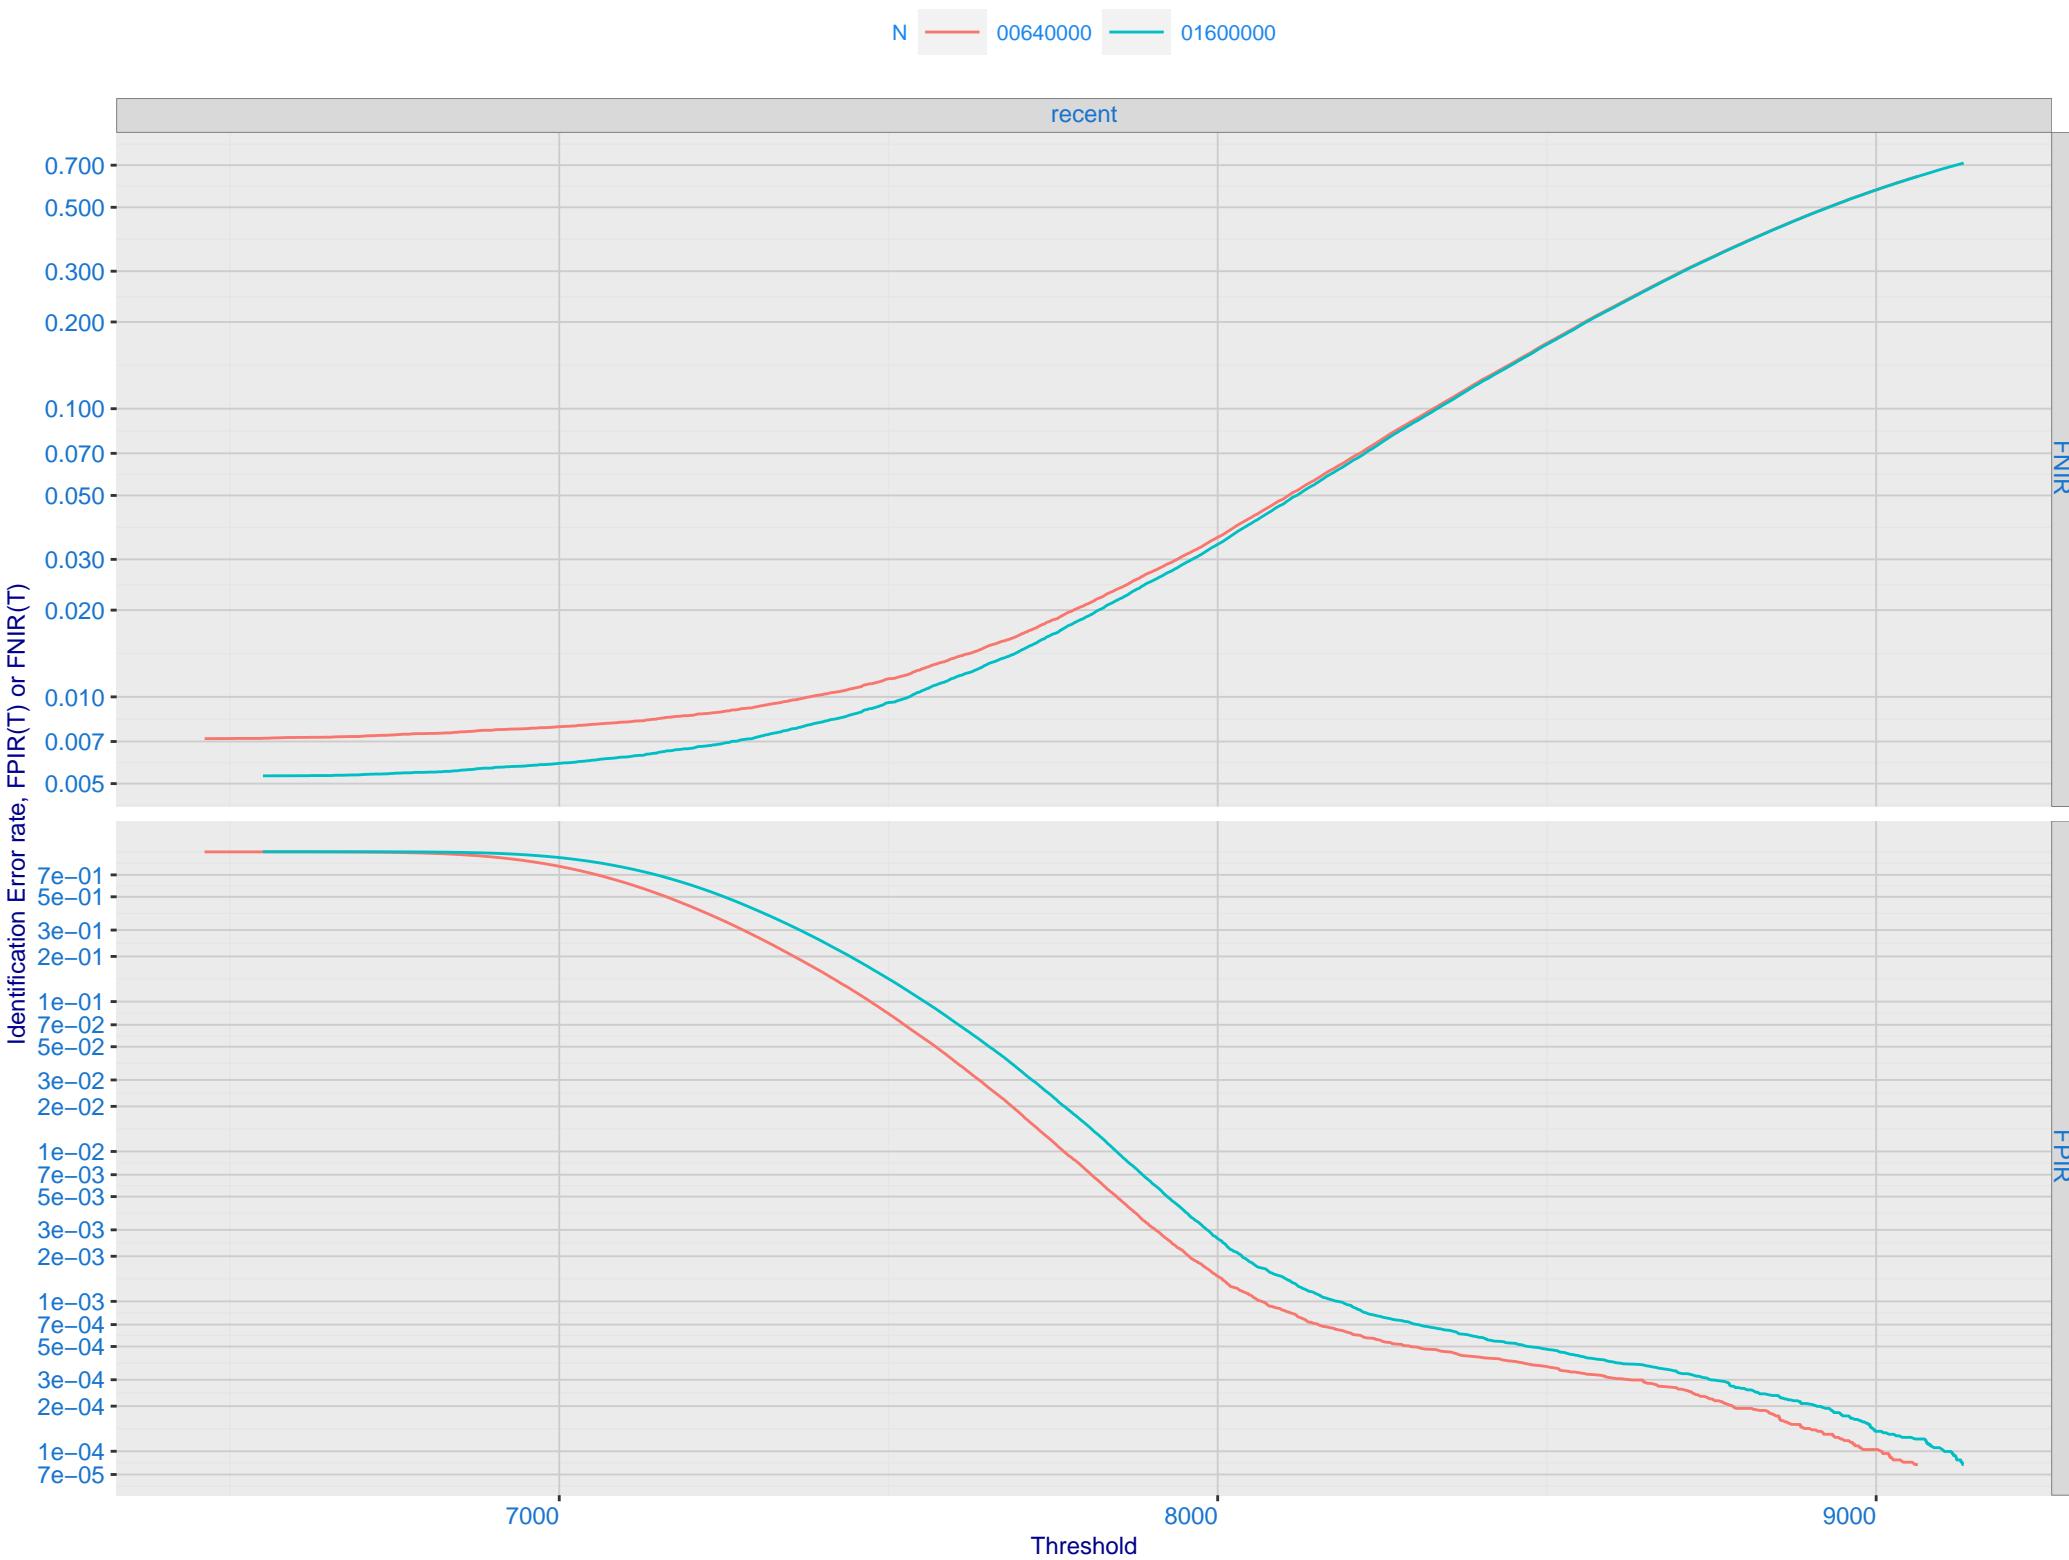

F: FPIR vs. Selectivity for mugshot images, N = 1600000 subjects enrolled with one recent mate

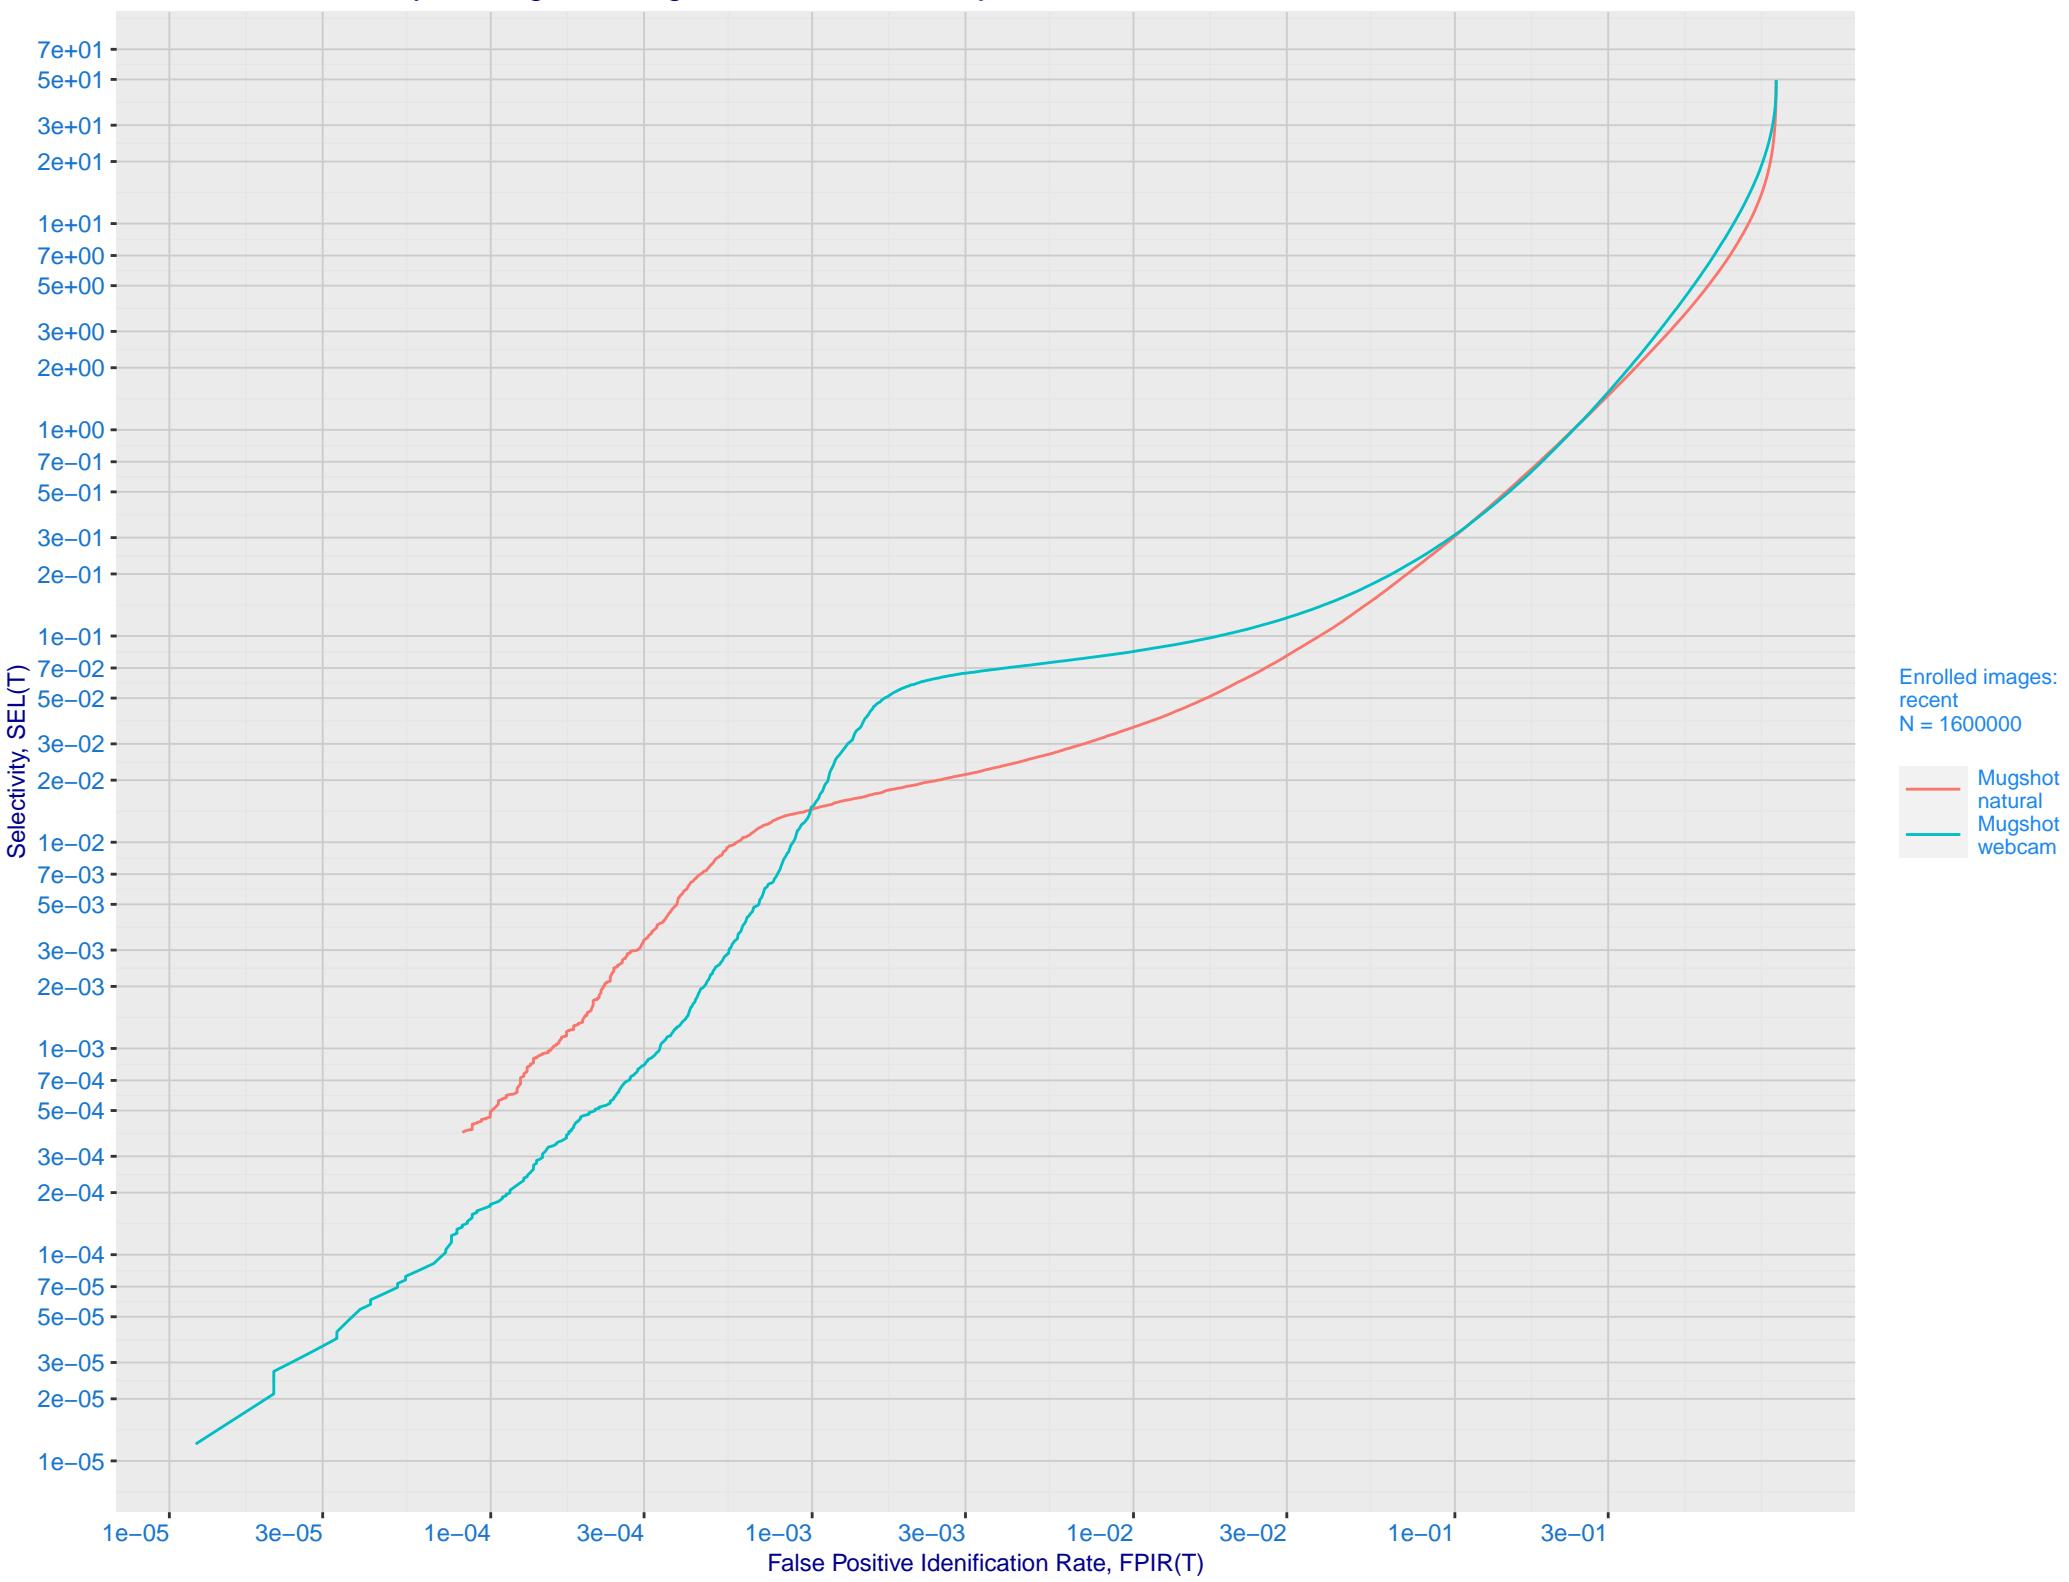


G: FPIR dependence on T by probe type for N = 1600000 subjects

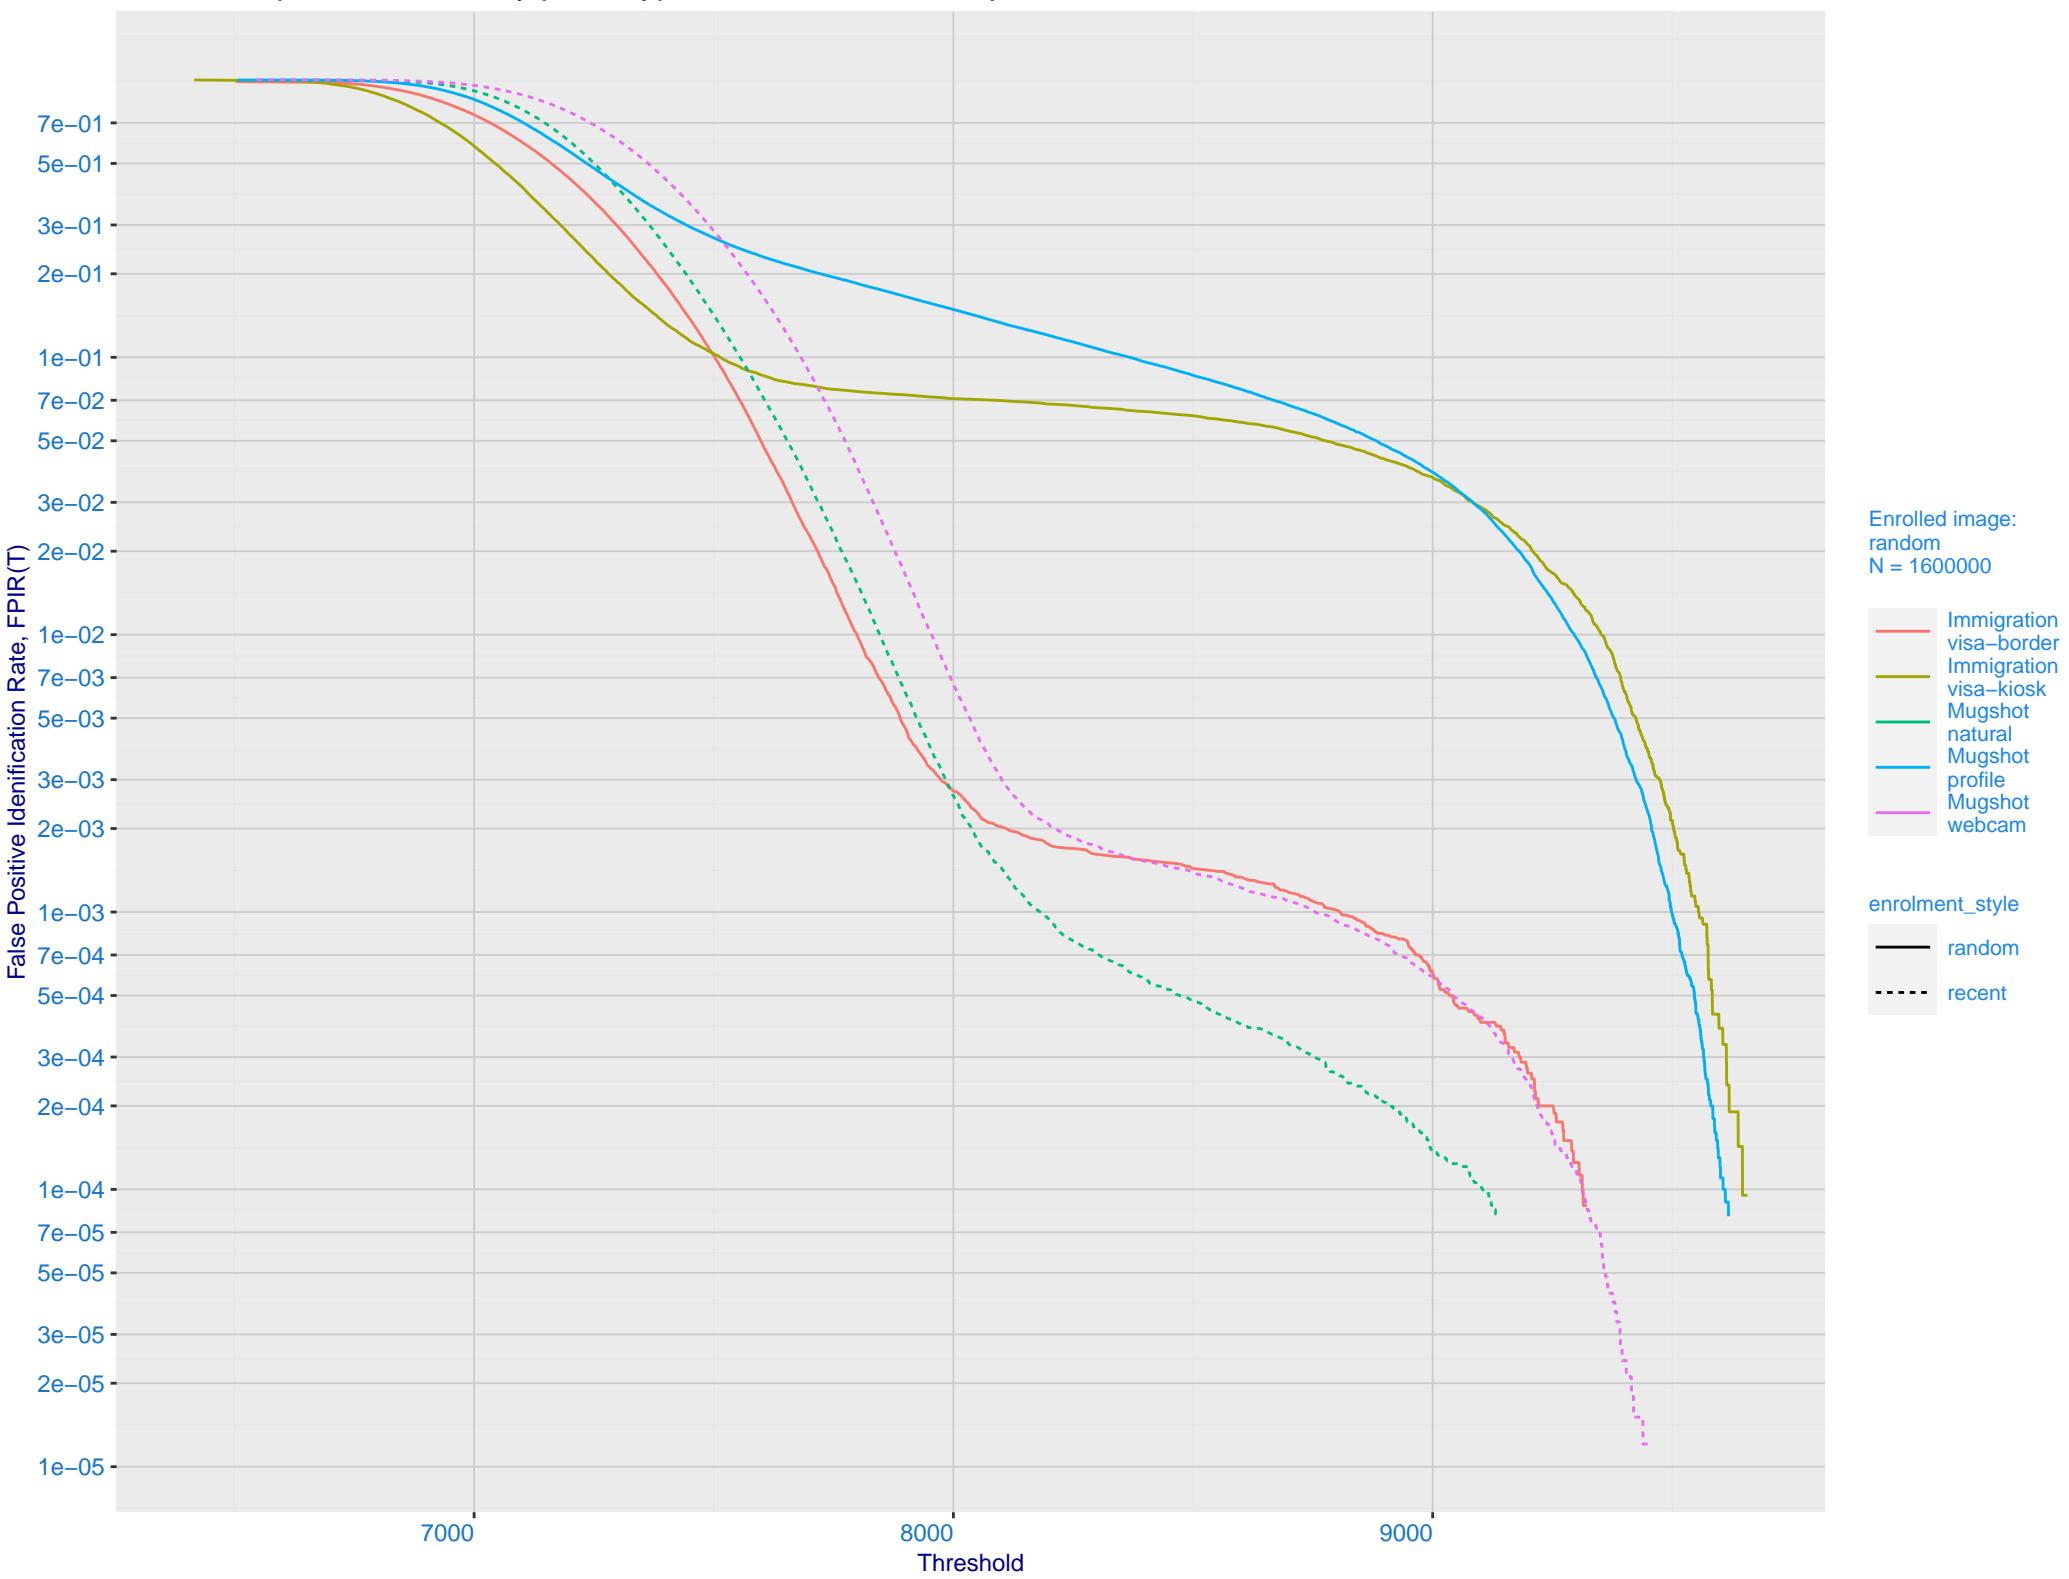


#### H: Reduced length candidate lists for human review

Dataset is border–border with time–lapse [10,15] YRS with N = 1600000. Probes are 10–15 years later than enrollment image

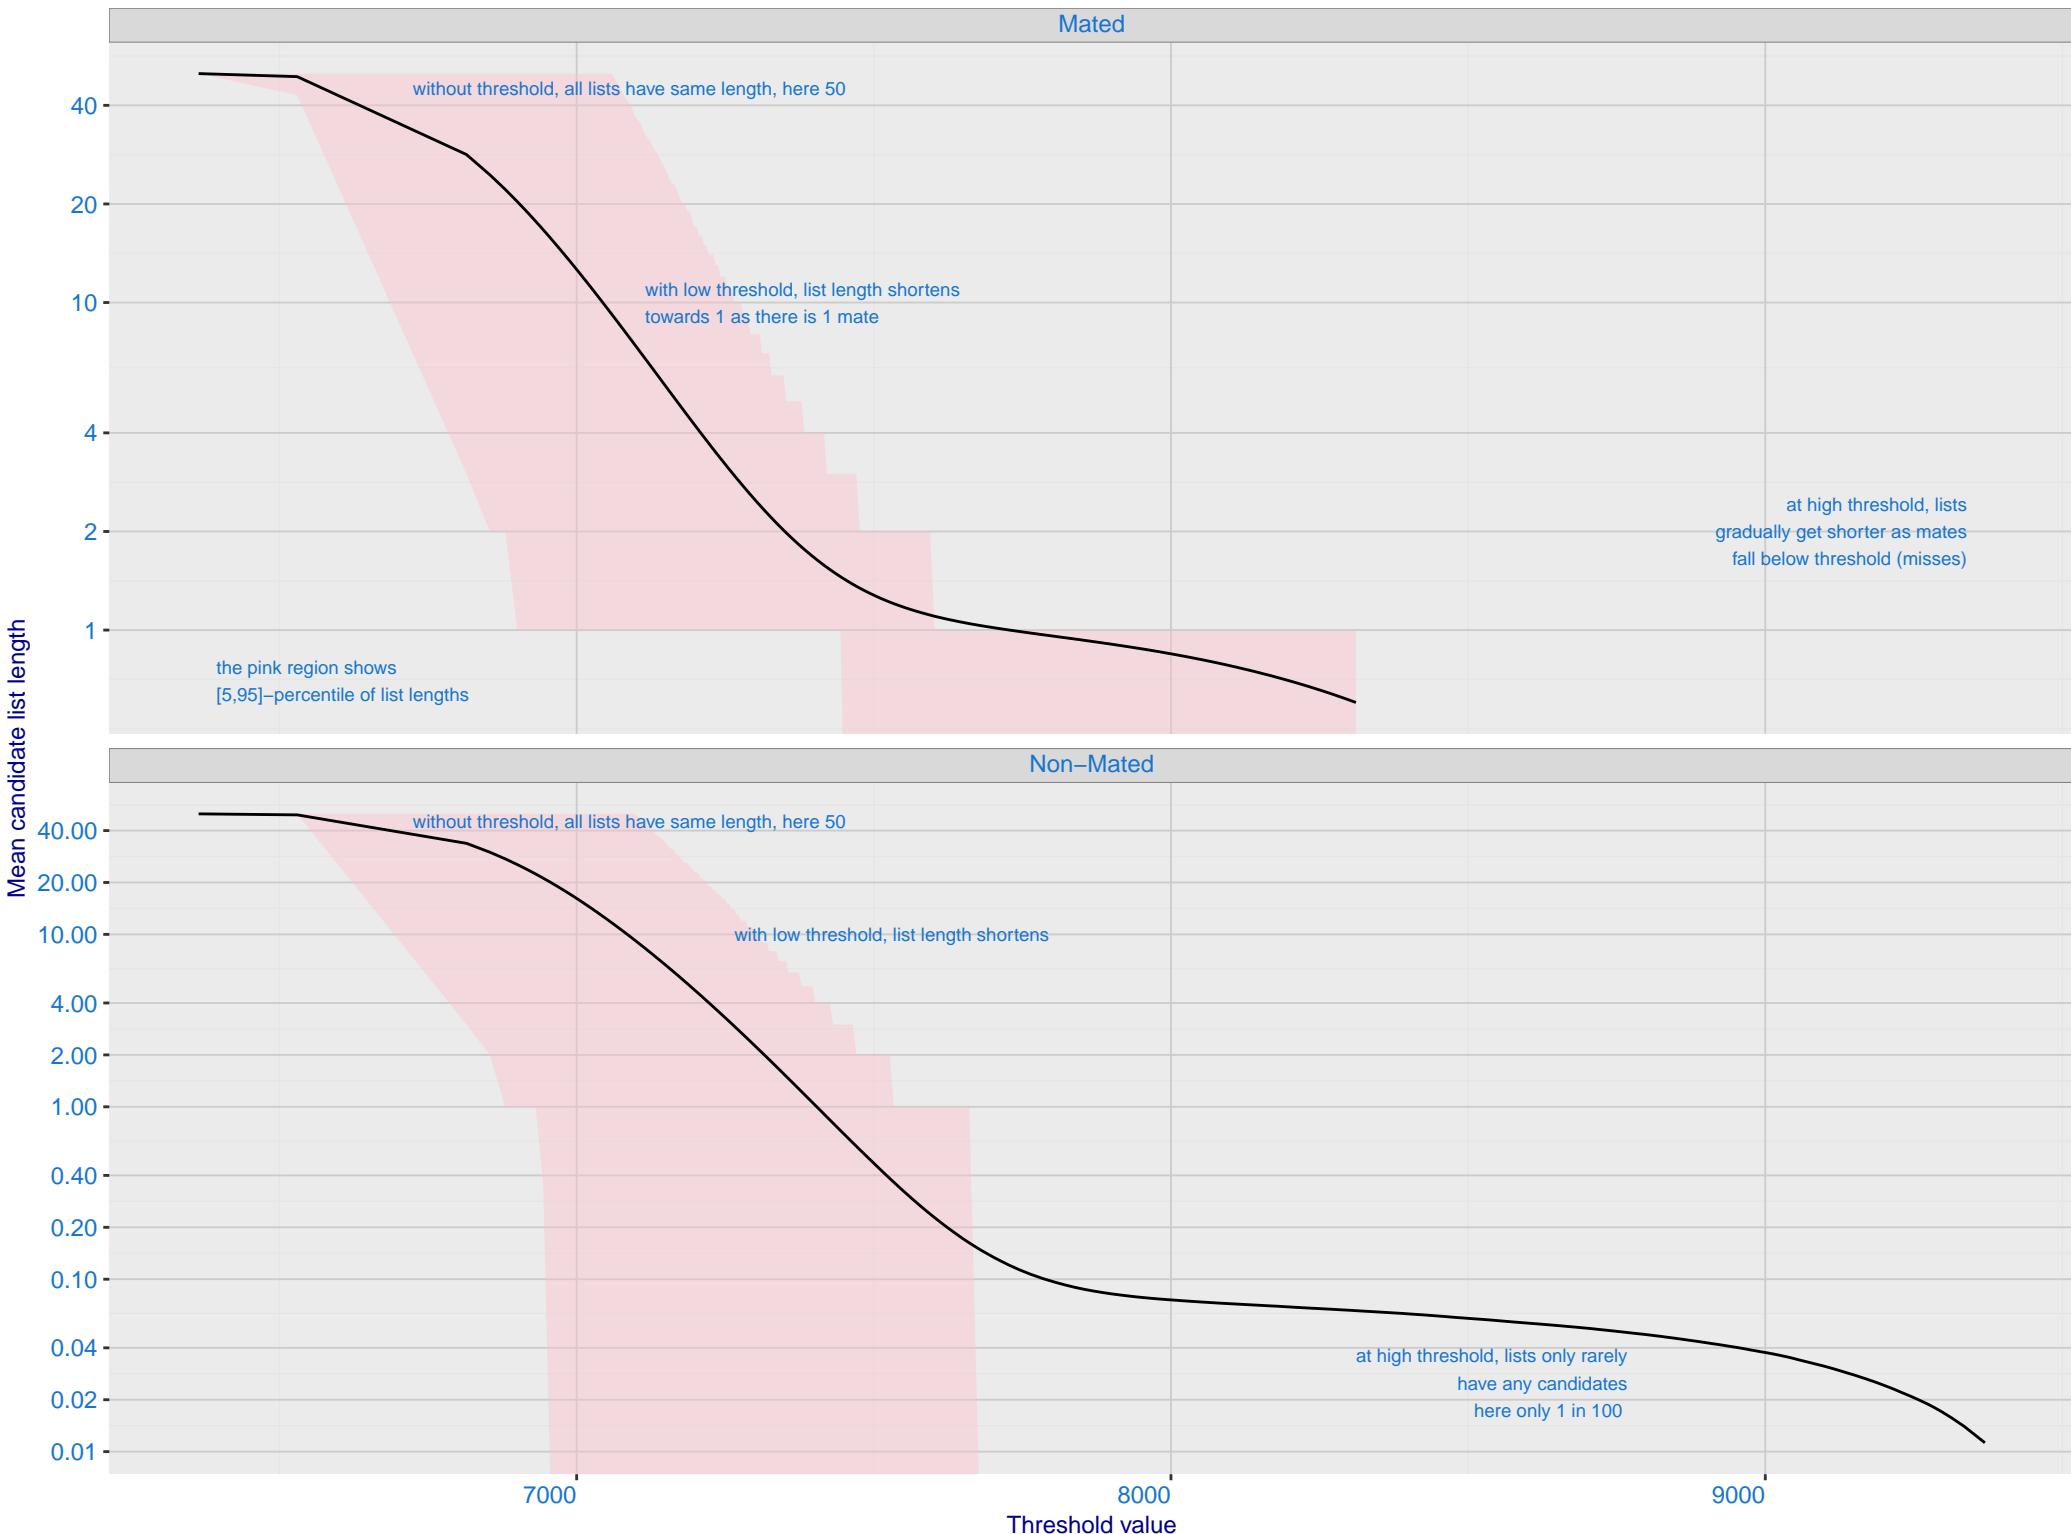


# I: FNIR and FPIR dependence on threshold


Dataset is border–border with time–lapse [10,15] YRS with N = 1600000. Probes are 10–15 years later than enrollment image

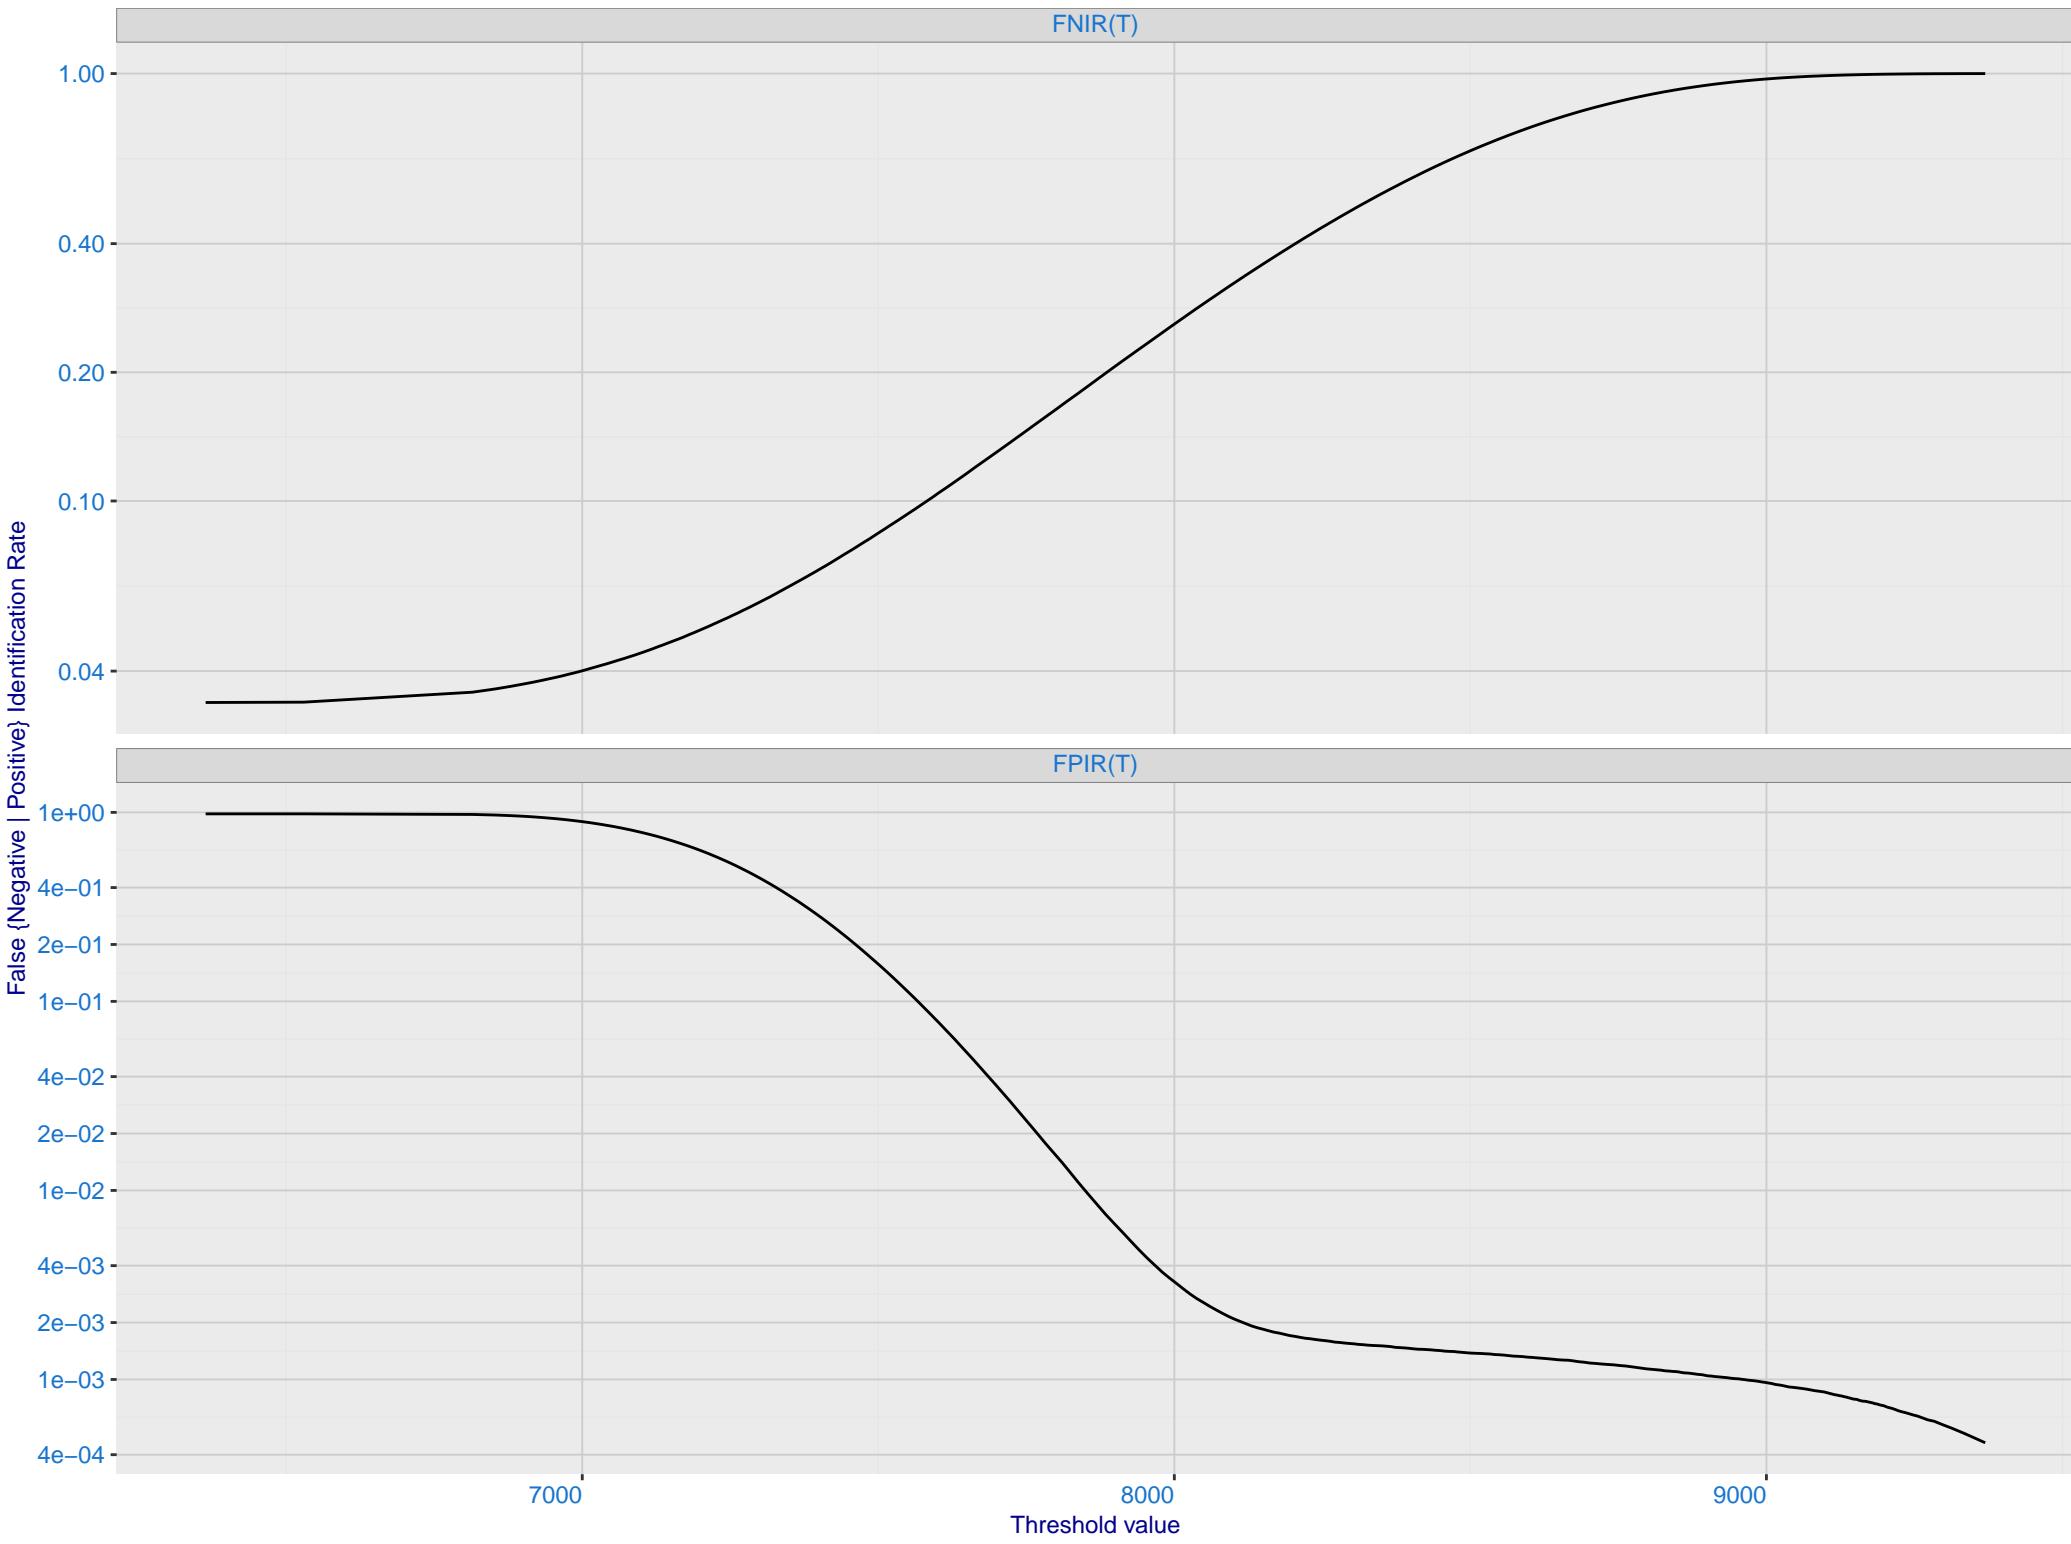


J: DET for Mugshot natural images and various N. Links connect points of equal threshold.

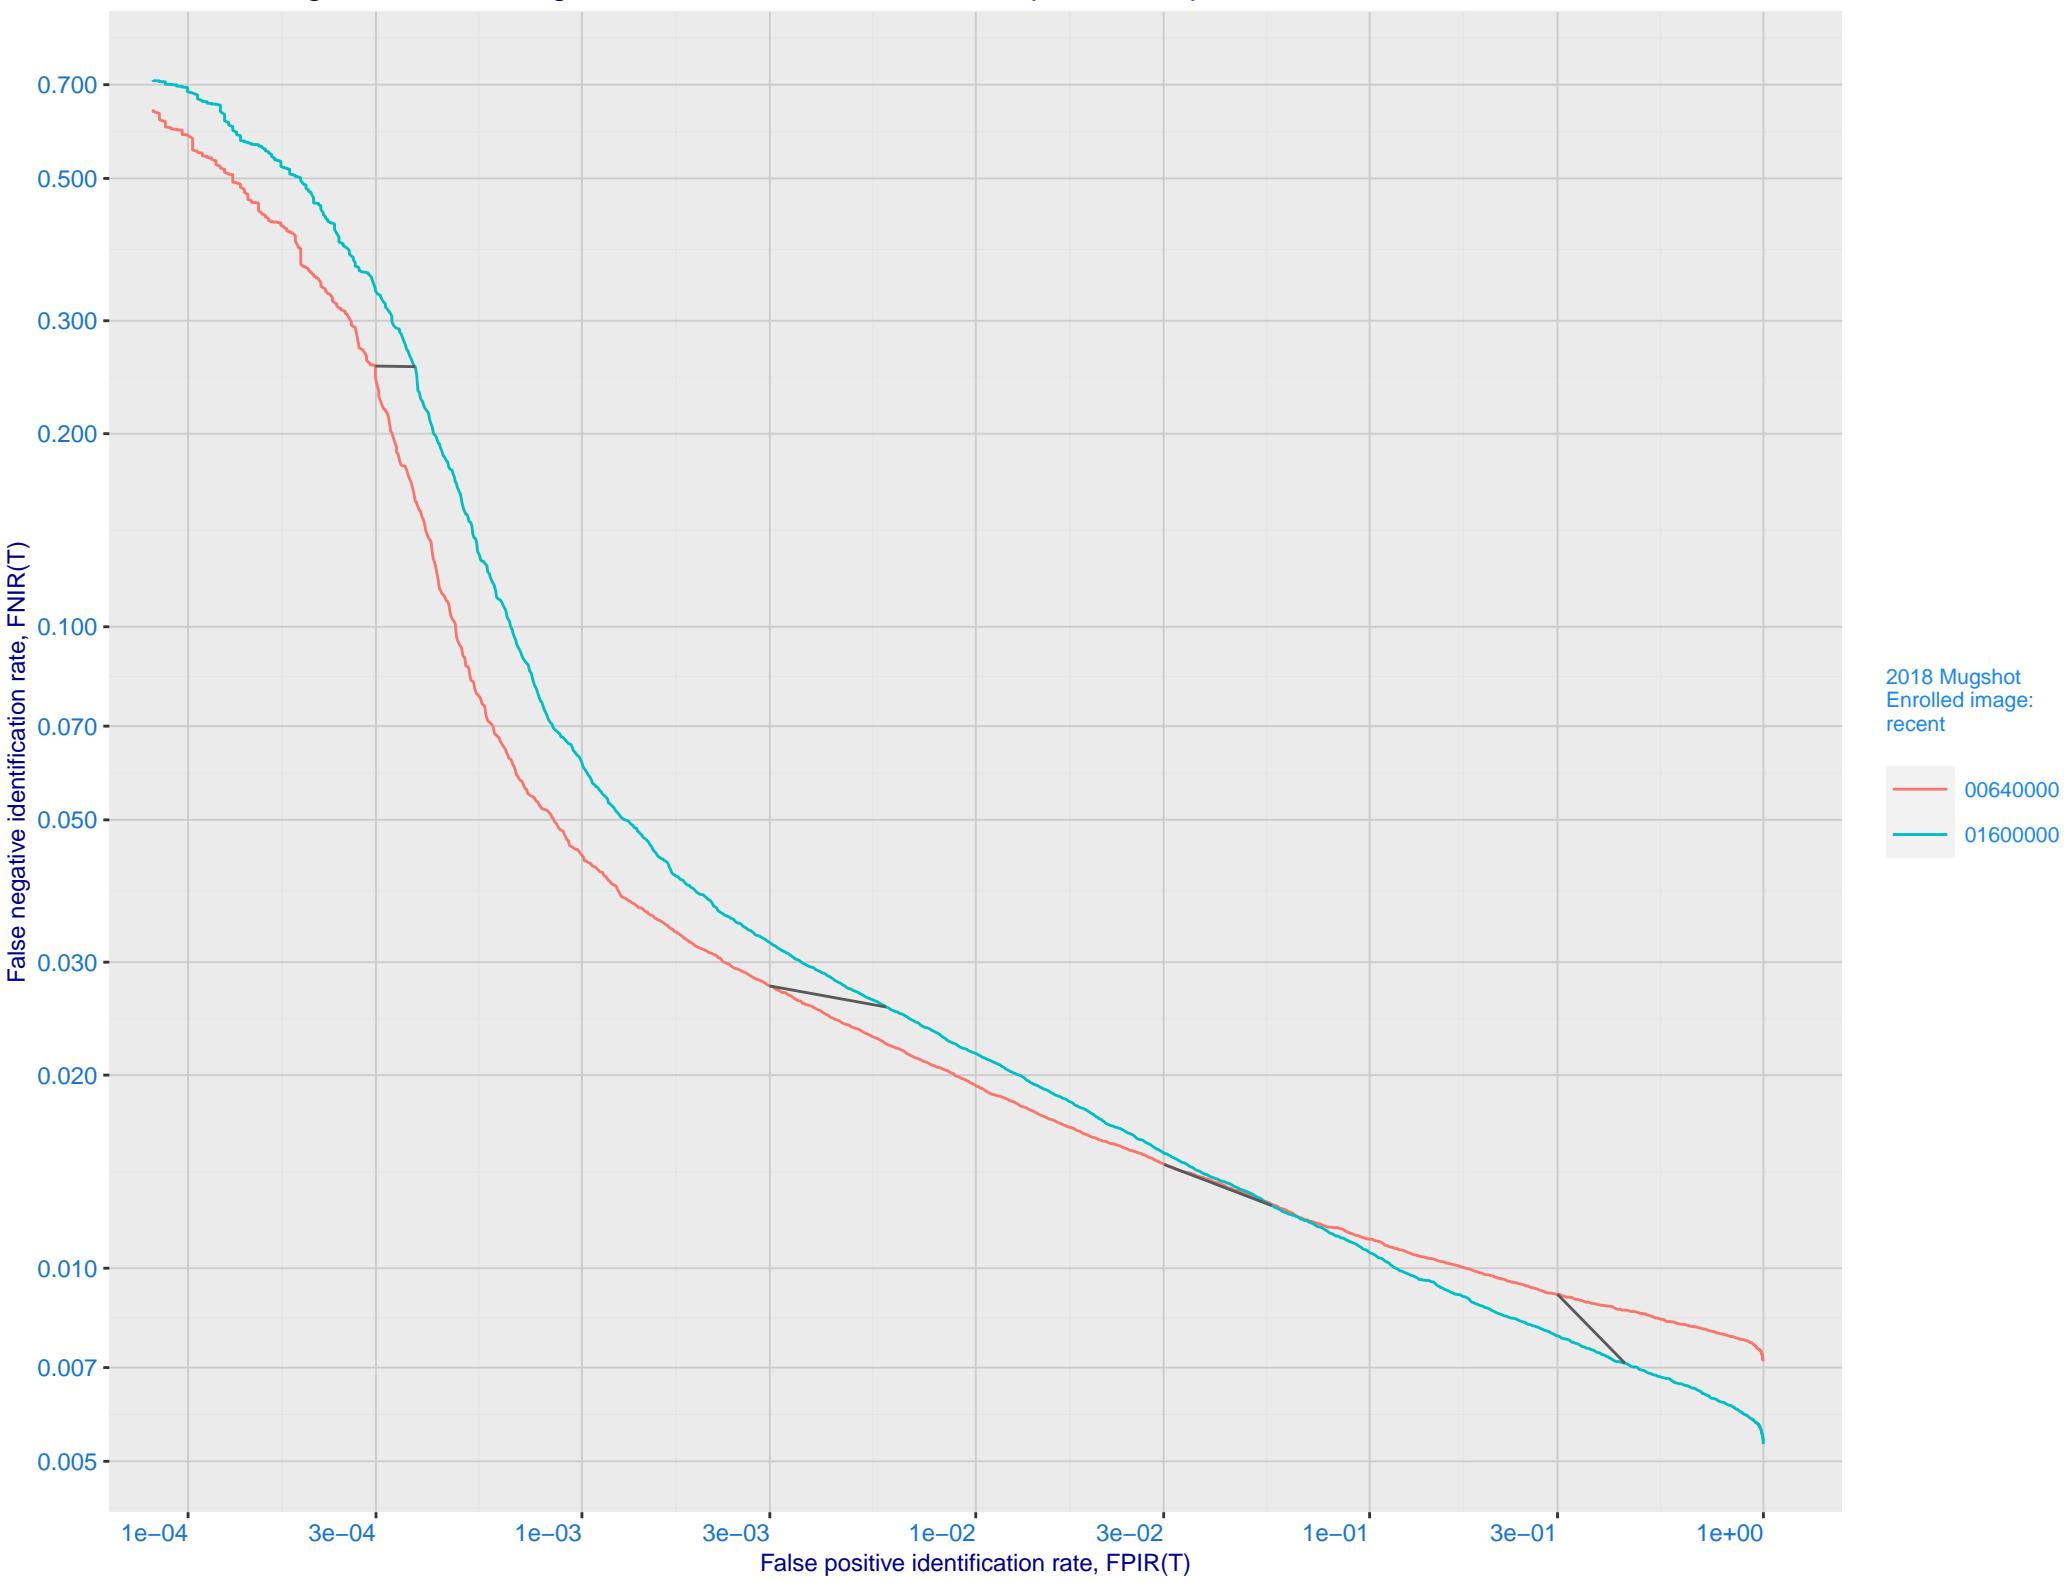


K: Investigational mode: FNIR(N, 1, 0) vs. most accurate (sensetime\_006)

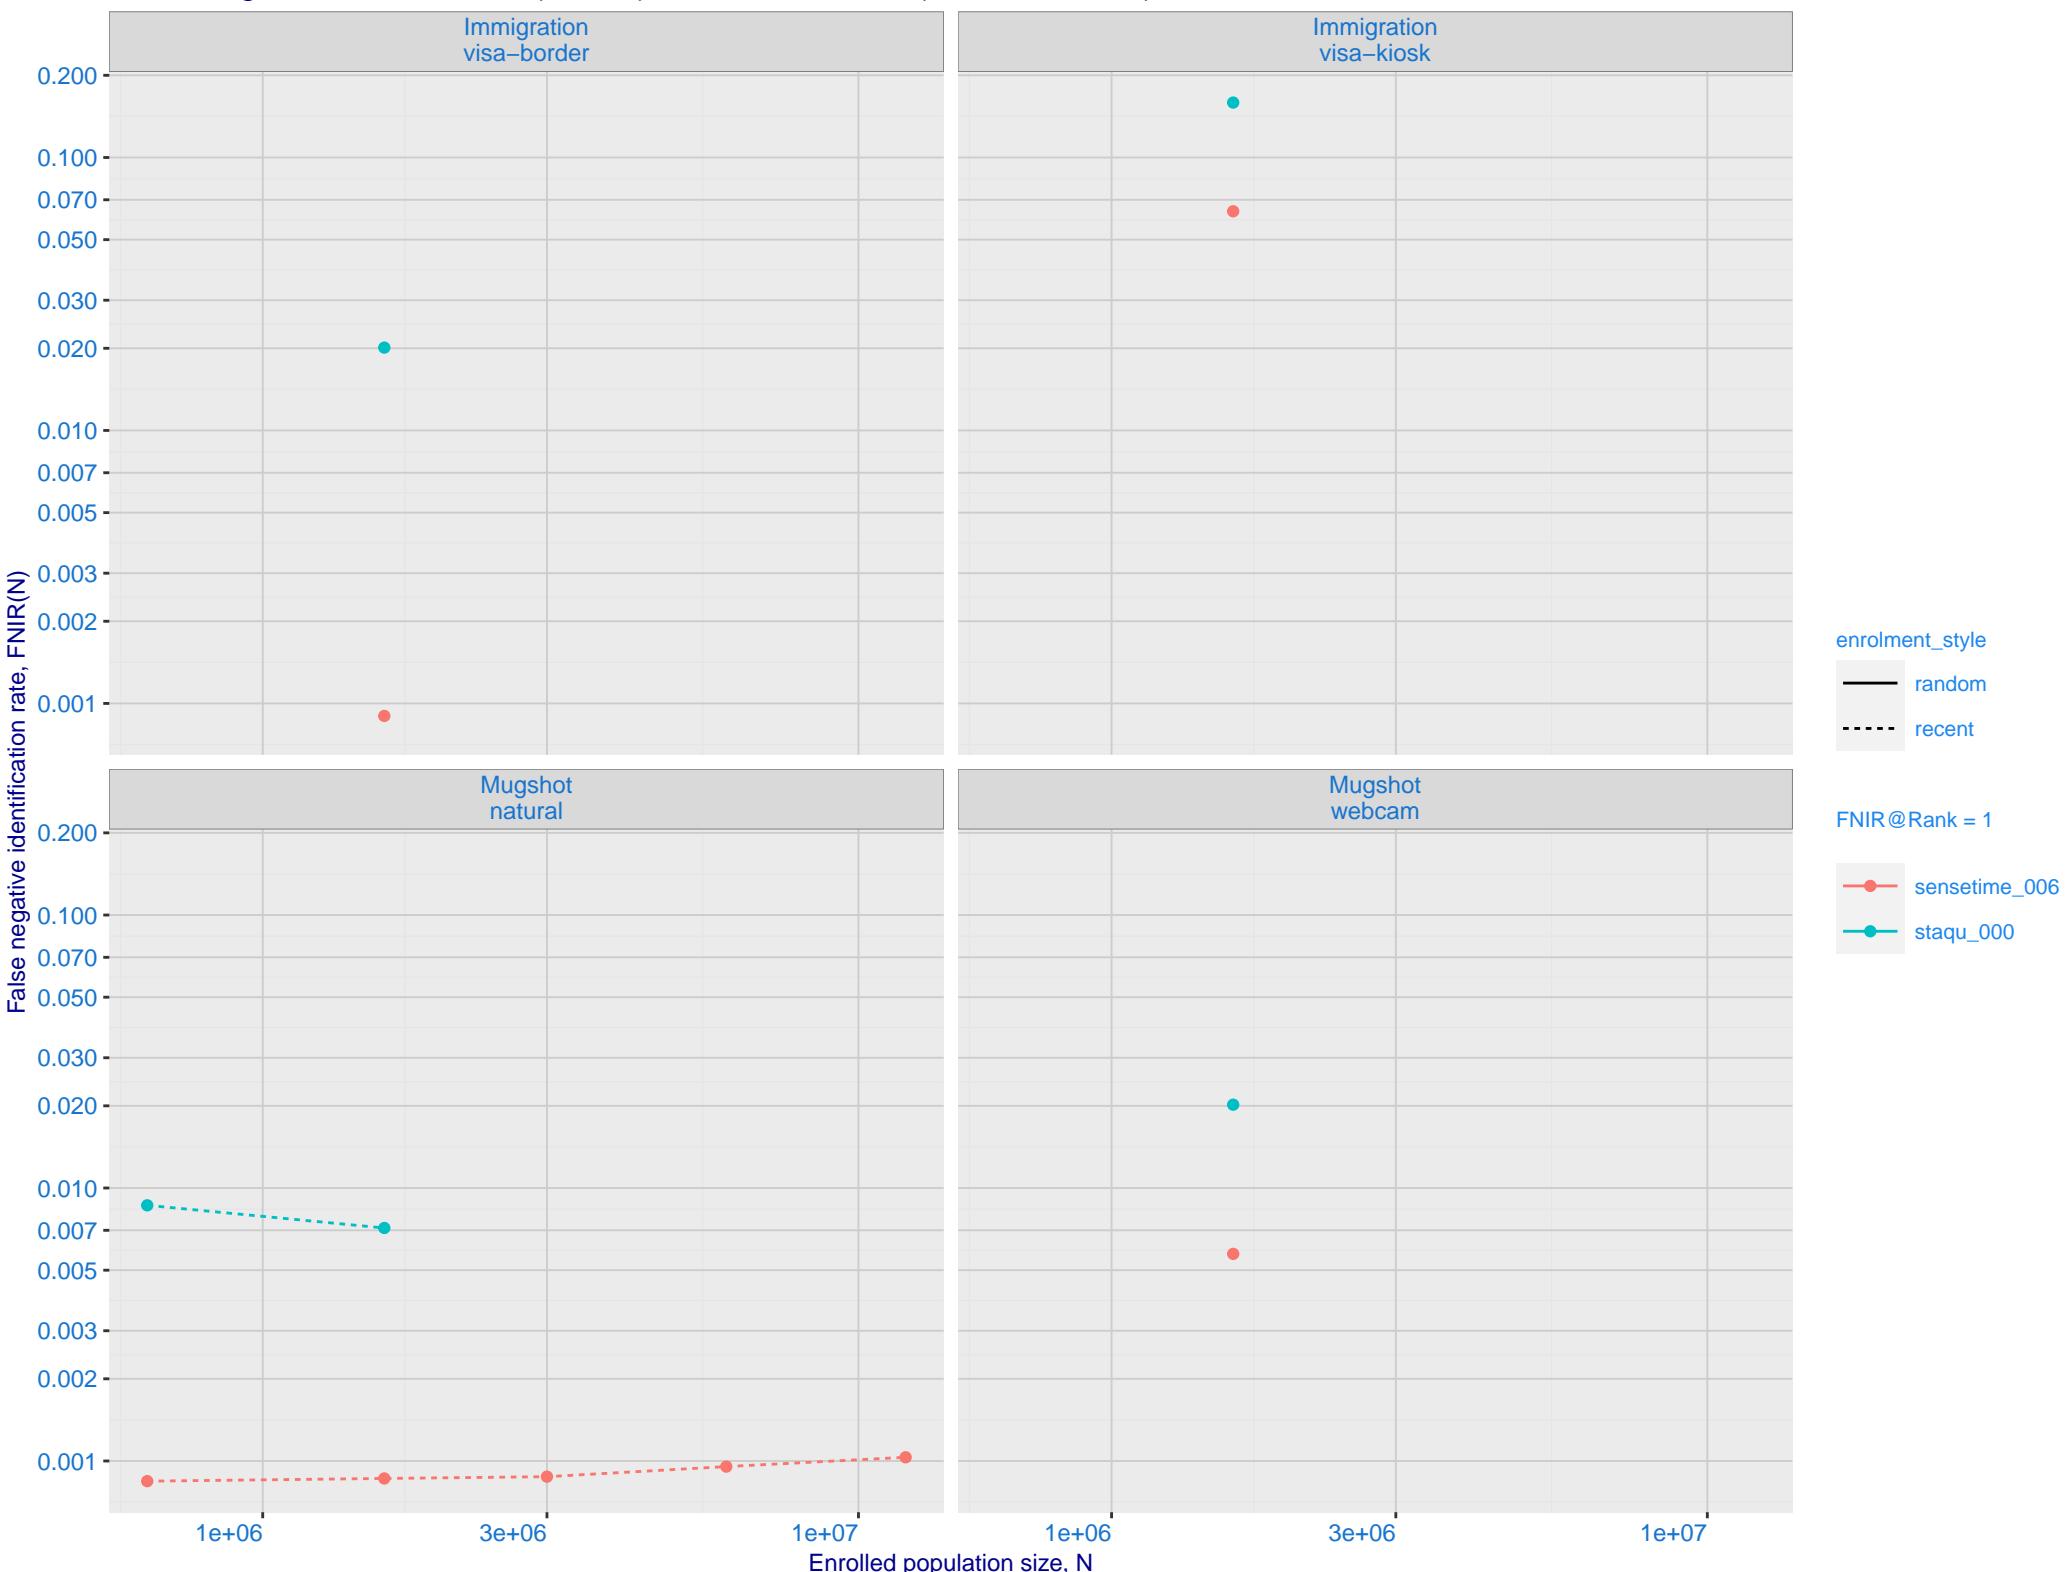


L: Investigational mode: FNIR(1600000, R, 0) by probe type

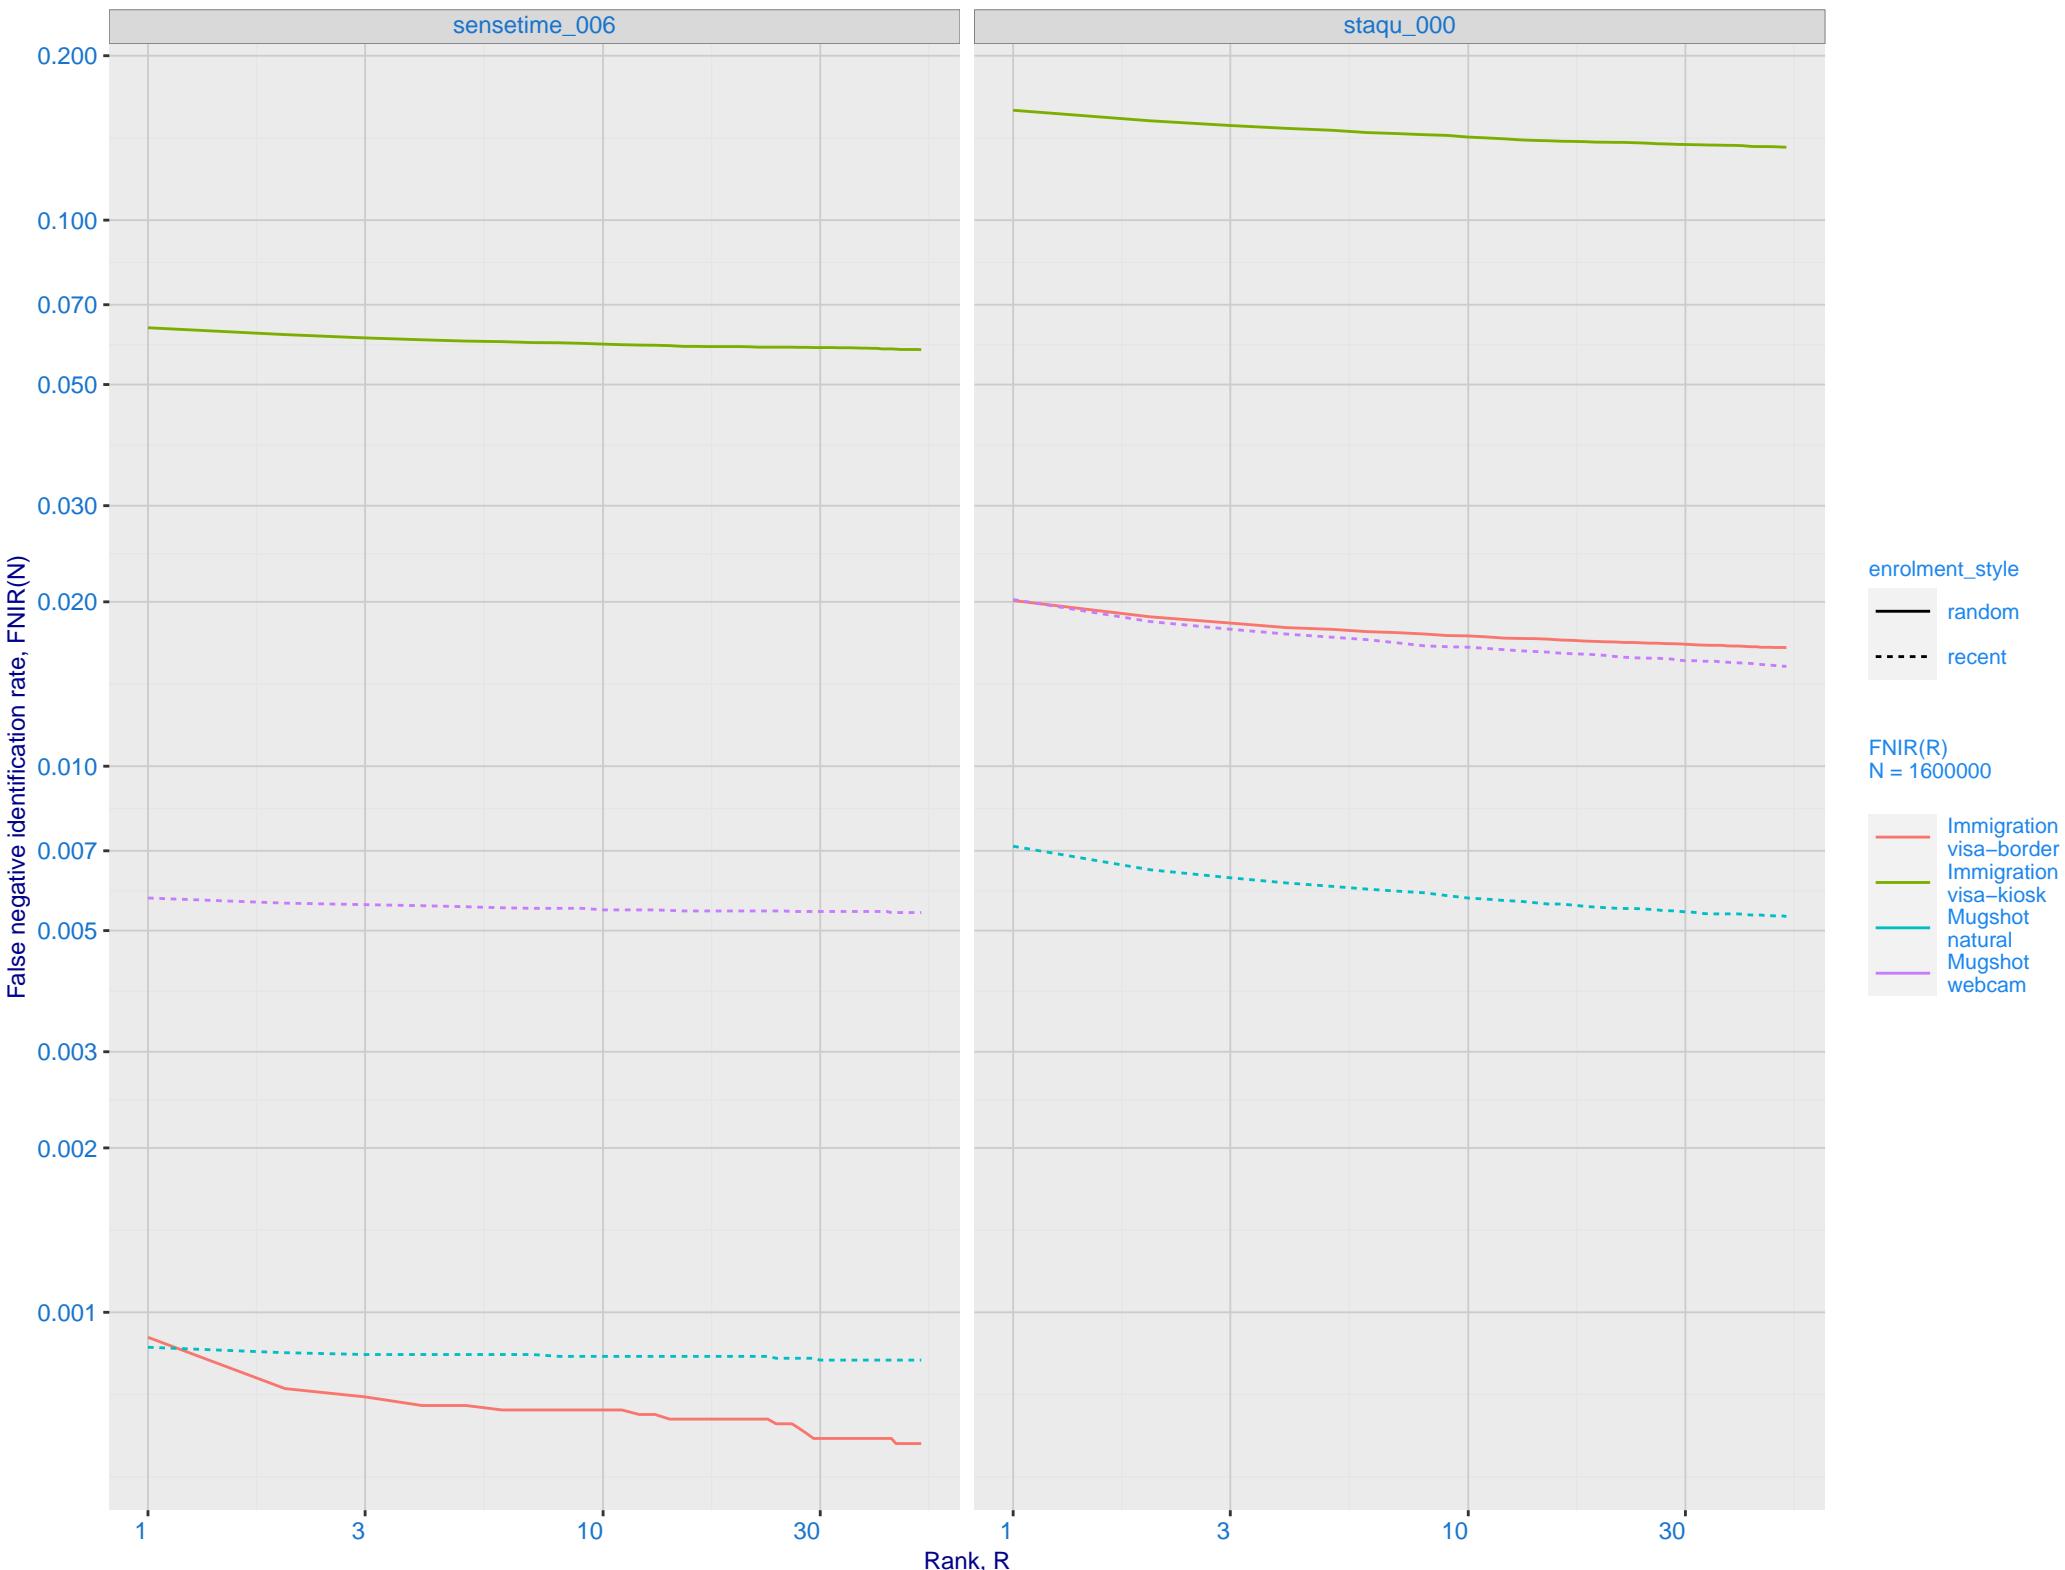

M: Template duration; search duration vs. N. The blue and pink ribbon covers 95 percent of observed measurements.  
The template generation time is independent of N. The log and power-law models are fit to the first two (N,T) observations

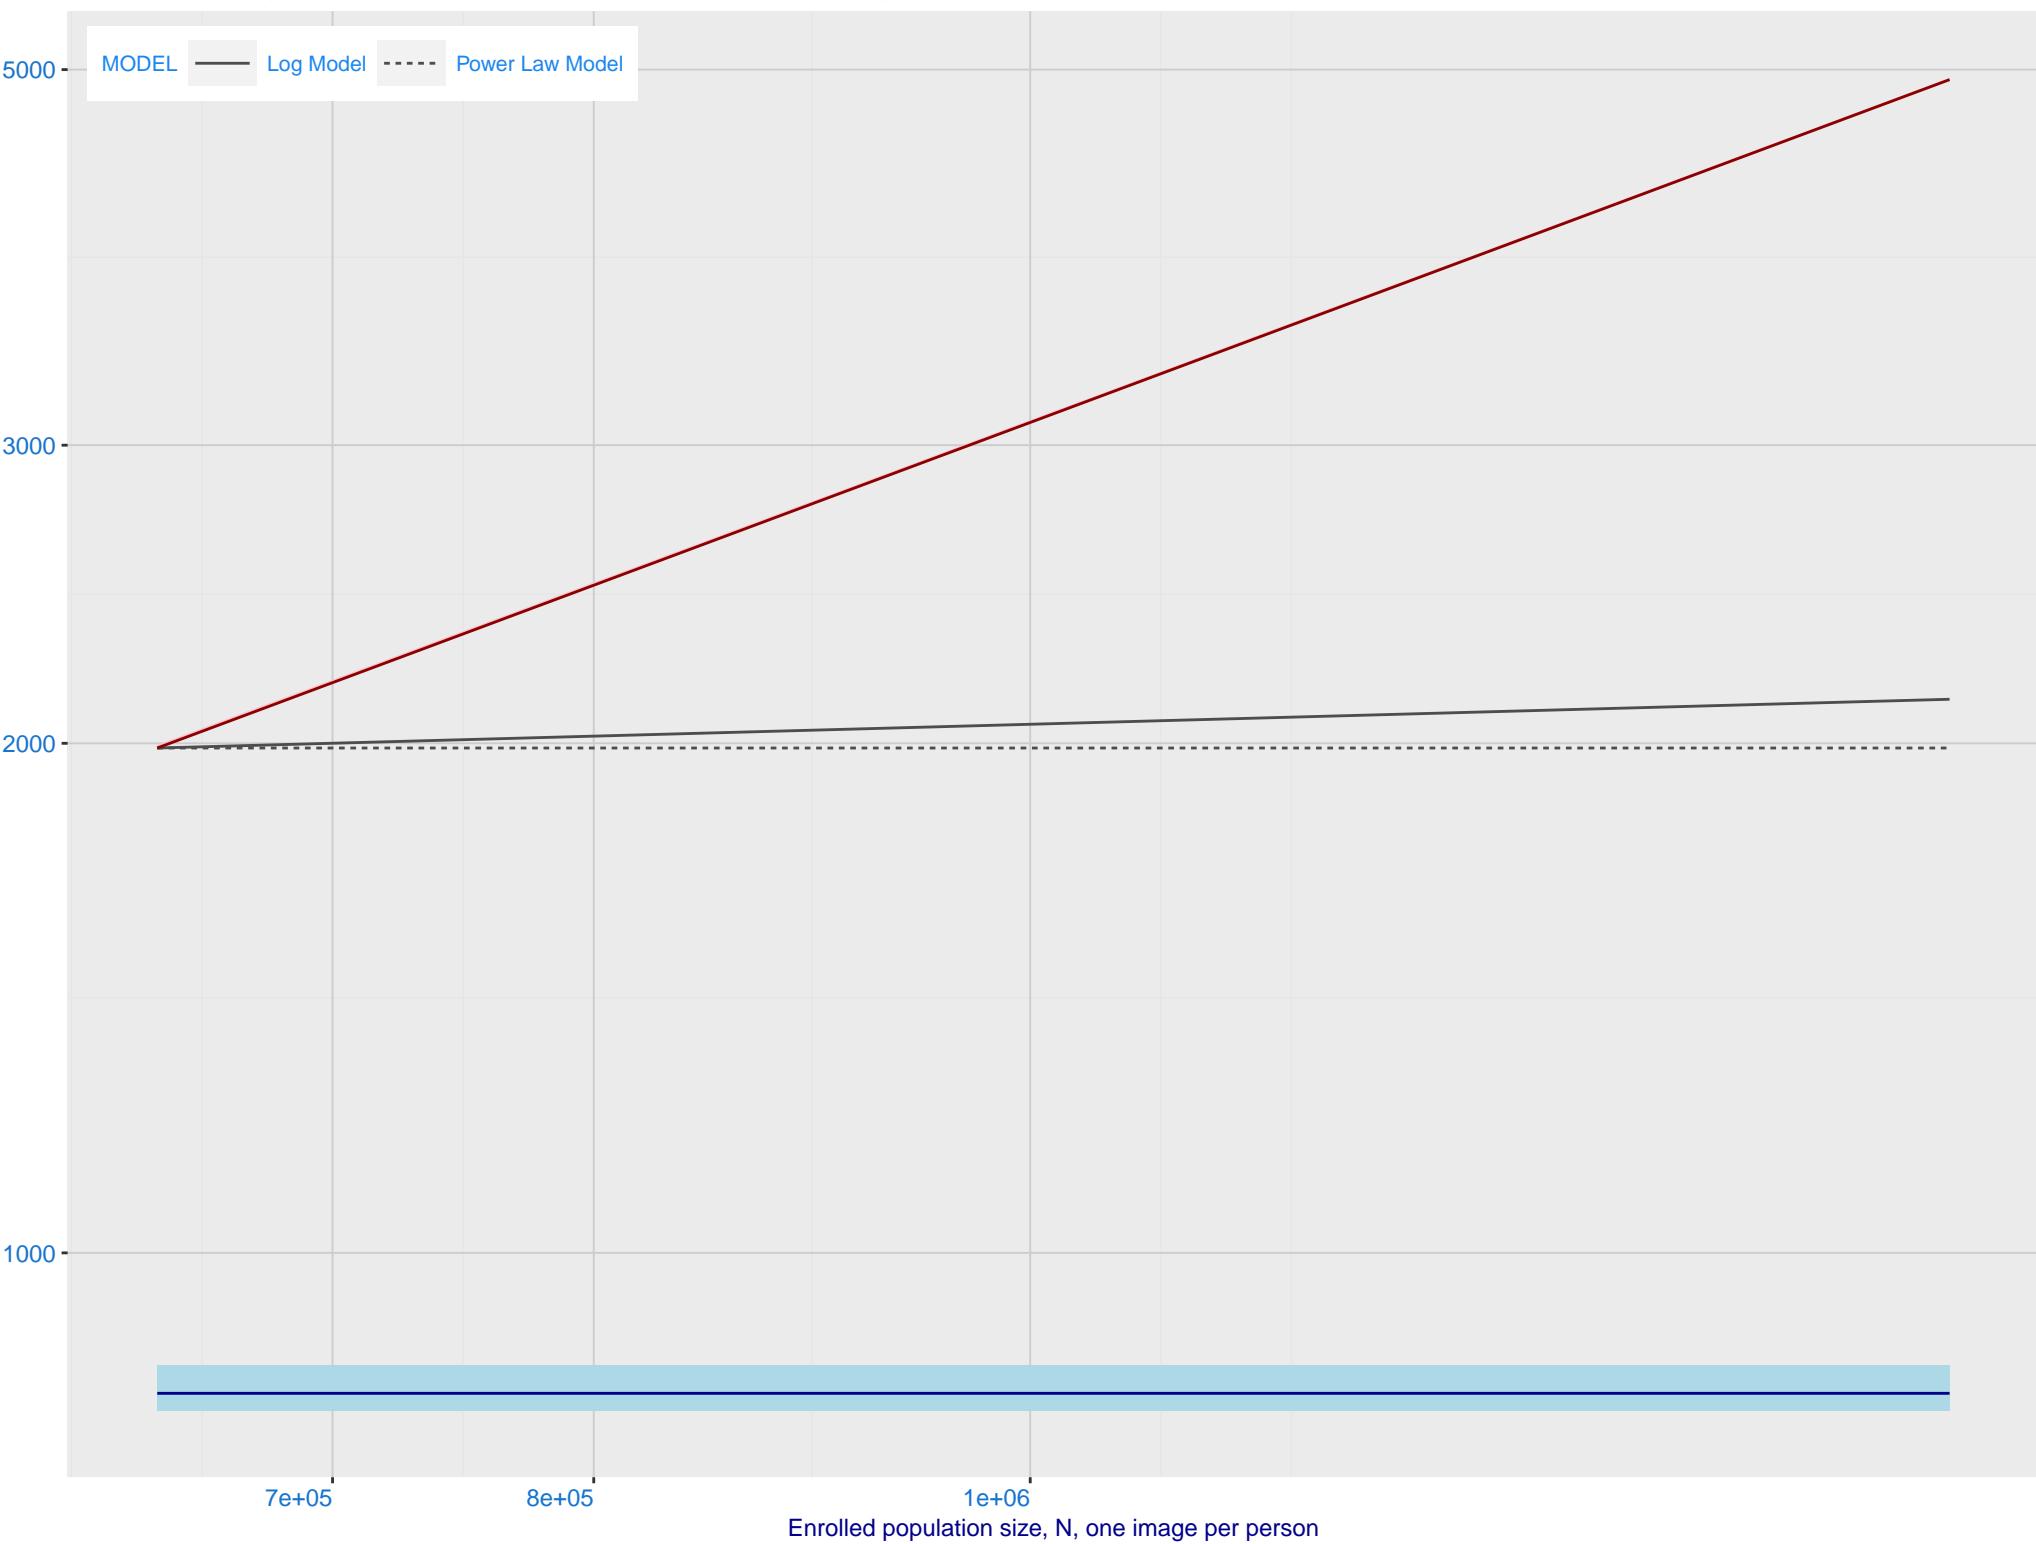

O: FNIR(T, N = 1.6 million) by sex, age and time-lapse. The top row gives investigational rank-1 miss rates.  
 The bottom panels give high threshold for more lights-out identification with low FPIR.

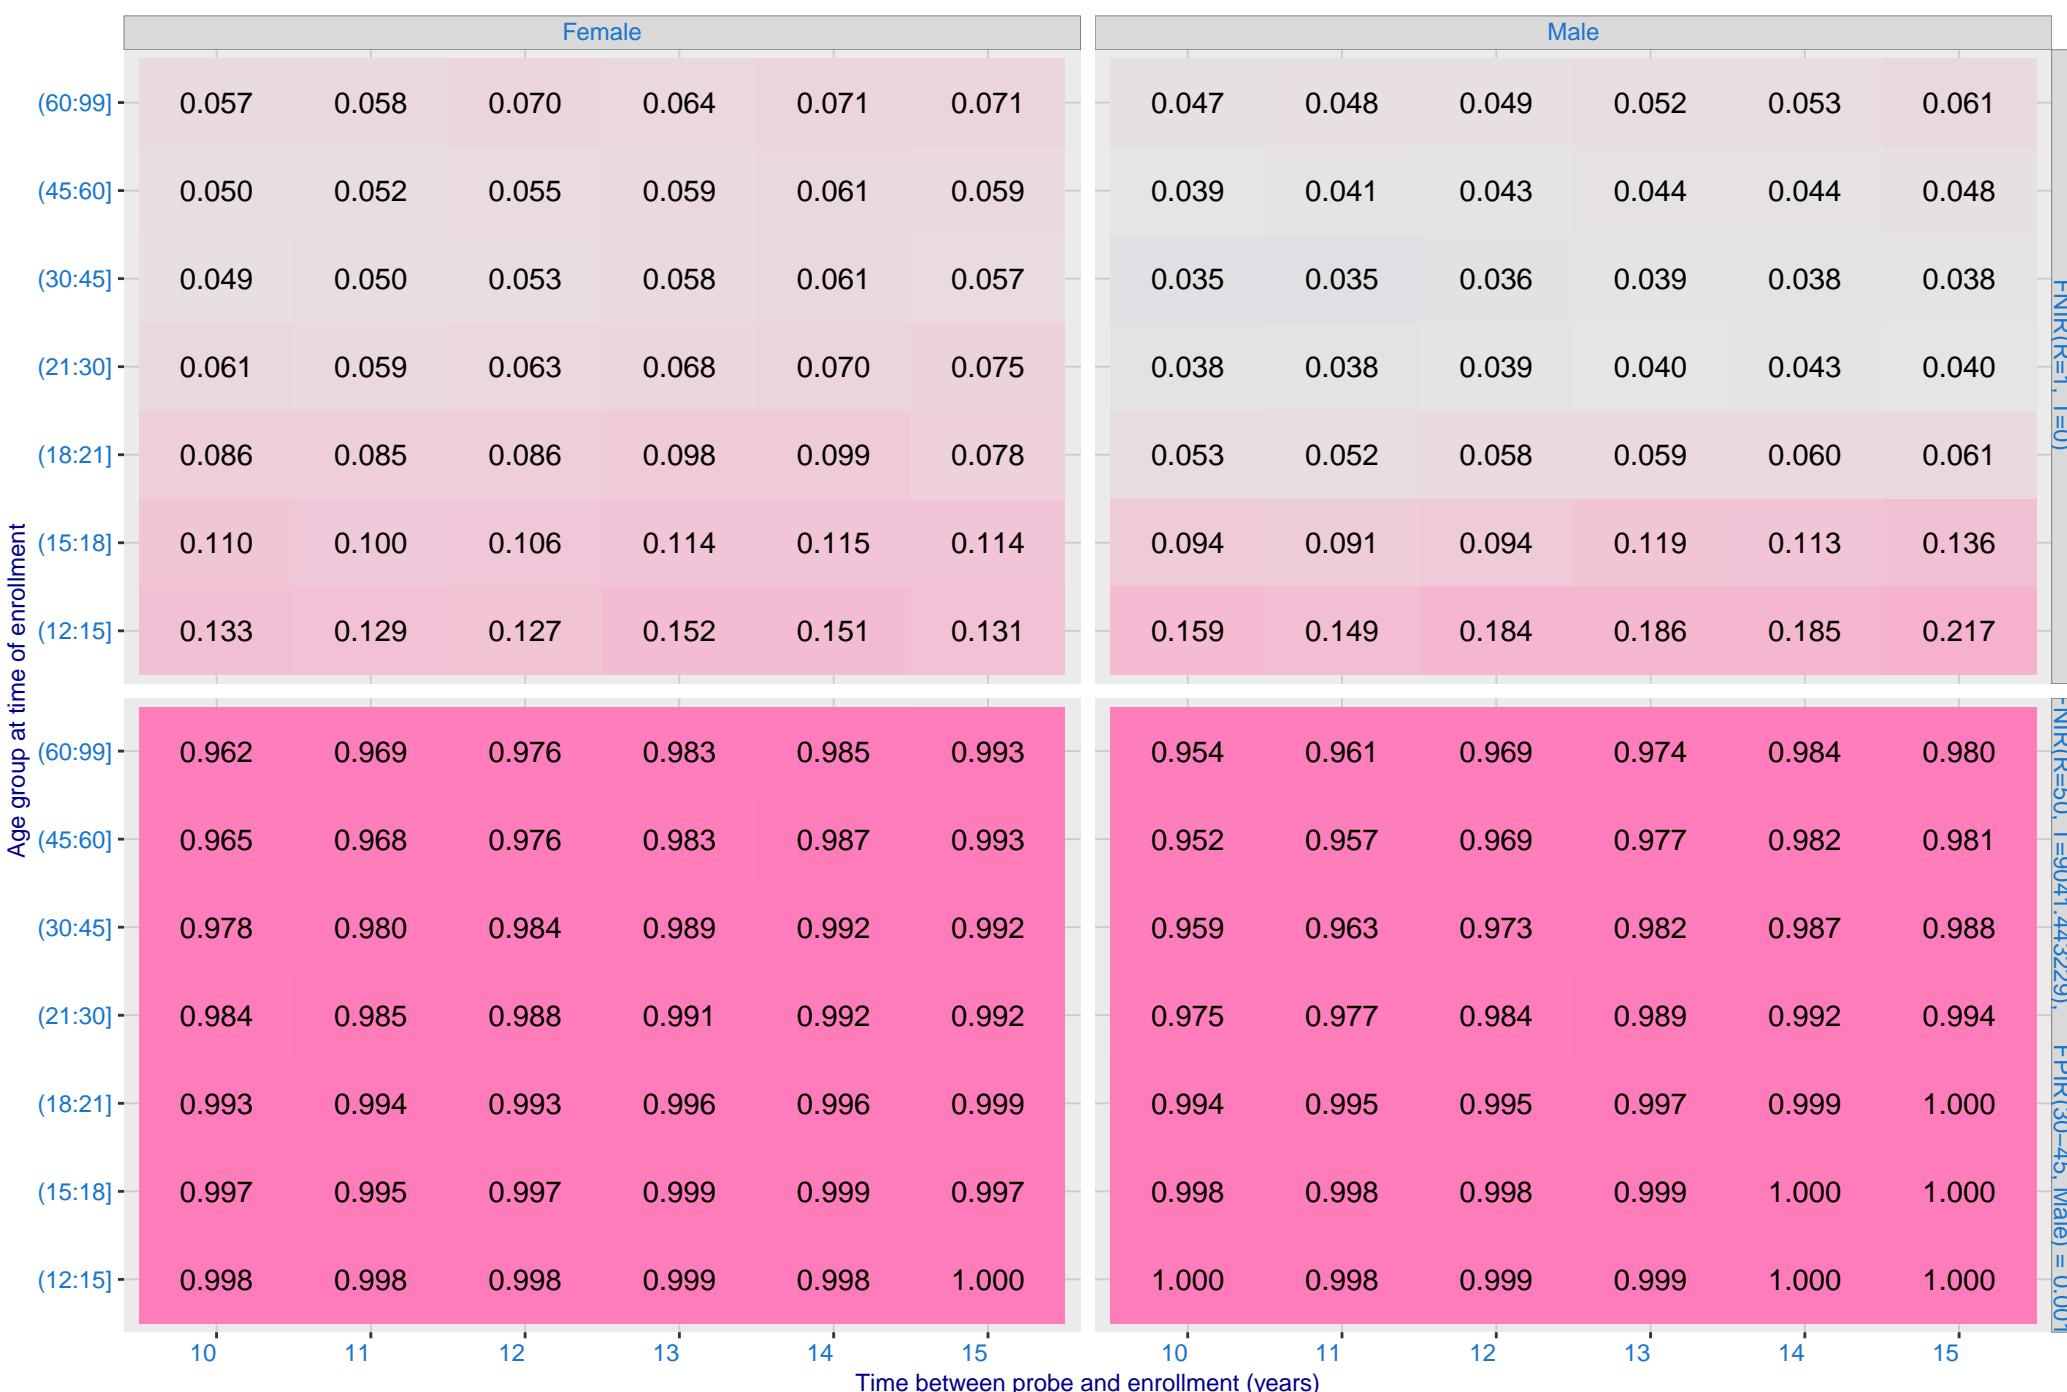

P: FPIR(N = 1.6 million) by sex and age. It is typical for false positive identification rates to be higher in women except in their teens.

Algorithm: stagu\_000, Dataset: Border–Crossing Ageing  
Threshold: 9041.443229 set to achieve FPIR(30–45, Male) = 0.001

Color encodes log(FPIR)



(The age of the highest non-mates will usually be similar to that of the probe.)

(60:99] 0.0025 0.0019

(45:60] 0.0006 0.0013

(30:45] 0.0005 0.0010

(21:30] 0.0005 0.0007

(18:21] 0.0004 0.0008

(15:18] 0.0006 0.0008

(12:15] 0.0006 0.0007

Female

Male

Sex of person in non-mate probe  
(The sex of the highest non-mates will usually be that of the probe.)

Q: Identification FNIR(N, T, L+1) and Investigational FNIR(N, 0, R) under ageing

Dataset: 2018 Mugshot N = 3068801

